

REMS Akku-Press 14V ACC

Cordless radial press 32 kN with automatic circuit control

Universal, handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints \varnothing 10 – 108 (110) mm / \varnothing $\frac{3}{8}$ – 4

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 188 – 222.

REMS Akku-Press 14V ACC – universal up to \varnothing 110 mm. With automatic circuit control. Secure crimping in seconds. Automatic locking of pressing tongs. Li-Ion 14.4V, 3.0 Ah battery for approx. 270 pressings Viega Profipress DN 15 with one battery charge.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 188 – 222). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 222.

Design

Compact, handy, light. Drive unit with battery only 4.3 kg. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs/adapter tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.


Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 3.0 Ah capacity, for long service life. Light and powerful. Li-Ion 14.4 V, 3.0 Ah battery for approx. 270 pressings Viega Profipress DN 15 with one battery charge. Operating temperature range -10 to $+60$ °C. No memory effect for maximum battery power. Rapid charger 220 – 240V or 110 V, 10.8 – 18V, 65W, for short charging times. Voltage supply 220 – 240V/14.4V, 33A output, for mains operation instead of Li-Ion battery 14.4 V, as accessory.



Tested by electrosuisse >>>

German Quality Product

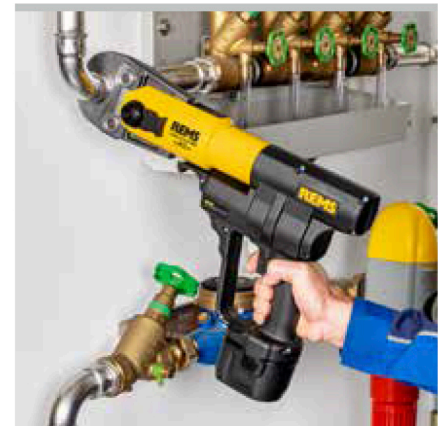



Supply format

REMS Akku-Press 14V ACC Basic-Pack. Cordless radial press 32kN with automatic circuit control for producing pipe pressing joints \varnothing 10–108 (110) mm, \varnothing $\frac{3}{8}$ –4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 14.4 V, 3.0 Ah, rapid charger 220–240V or 110 V, 50–60 Hz, 10.8–18V, 65W.

Version	Art.-No.
In sturdy steel case.	571014
In L-Boxx system case.	571019
Other voltages on request.	

Accessories

Description	Art.-No.
REMS pressing tongs/pressing rings see page 188–222.	
REMS cropping tongs for threaded rods see page 225.	
REMS cable shear for electric cable see page 225.	
REMS Akku-Press 14V ACC drive unit, without battery	571004
Battery Li-Ion 14.4 V, 3.0 Ah	571555
Rapid charger 220–240V, 50–60 Hz, 10.8–18V, 65W	571560
Voltage supply 220–240V/14.4V, 50–60 Hz, 33 A, for mains operation instead of battery Li-Ion 14.4 V.	571565
Steel case with inlay	571290
L-Boxx system case with inserts	571283

