

Ever despaired when using poor quality bits?

Wera bits offer dependable work and a long product service life on account of their high precision profile design and outstanding concentricity features.

Wera bits have been designed for demanding applications in trade and industry. They permit the transfer of high torque loads and have a distinctively long service life.



Which type of bit is needed for which job?

Impact-Bits



are needed when a strong power tool (e.g. 18 volt impact screwdriver) is used. Impact bits were specifically developed to withstand high power tool impact forces.

Stainless



By using stainless steel bits, the formation of rust on stainless steel screws or surfaces is prevented. Rust on stainless steel mainly occurs from wear particles remaining after screwdriving work with conventional steel tools. Such steel wear particles adhere to the screw and begin to rust under the influence of oxygen and moisture. They are easily recognisable with their ice-blue banderole.

BDC-Bits



are absolutely premium products. They have a softer BiTorsion zone which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits. The diamond coating lowers the danger of slipping as the minute diamond particles literally "bite" themselves into the screw head. B stands for BiTorsion. DC stands for diamond coated.

Z-Bits



are ductile, tough bits for hard materials such as sheet steel or metal.

TZ-Bits



are Z bits with a torsion zone. Torsion bits absorb the damaging peak torque loads in the torsion zone. This prevents premature wear and enhances the service life of the bits.

BTZ-Bits



have an additional tempered BiTorsion zone, which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.

H-Bits



are particularly hard bits for semi-hard materials such as wood.

TH-Bits



are H bits with a torsion zone. Torsion bits absorb the damaging peak torque loads in the torsion zone. This prevents premature wear and enhances the service life of the bits.

BTH-Bits



have an additional tempered BiTorsion zone, which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.

TS-Bits



are torsion bits made from stainless steel. S stands for stainless. Suitable for all screwdriving jobs with stainless steel screws.

A-Bits



A stands for aviation. A bits are particularly hard bits with a sharp-edged profile which penetrates screw profiles full of paint (such as on fuselage panels) ensuring a dependable transfer of force between the bit and the screw.

J-Bits



J stands for Japan. J bits have been optimised to suit Asian PH screws. In particular, they are for use with very small dimensions as set out in the Japanese Camera Standard.

TiN-Bits



TiN stands for titanium-nitrite. An extremely hard coating to withstand permanent loads such as during continual screwdriving operations in series manufacturing.



Impaktor bits and holder

For superior service life



Wera is mindful of the increased market significance of impact drivers and has developed a bit and holder range especially for use with impact drivers.



Maximum utilisation of the material properties, a very special geometry – designed particularly to meet the extreme demands – as well a specific manufacturing process mean that Wera Impaktor tools have an above-average service life.

For use with impact screwdrivers.

Particularly high strength. Reduce the danger of premature bit breakage.

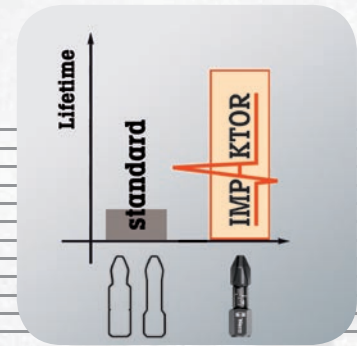

Improve productivity when screwdriving with power tools (e.g. 18 volt impact screwdrivers).




Torsion zone specially designed to absorb such forces and thereby protect the bit tip.



Another product advantage is the coating of the Impaktor bits with minute diamond particles.



IMPAKTOR

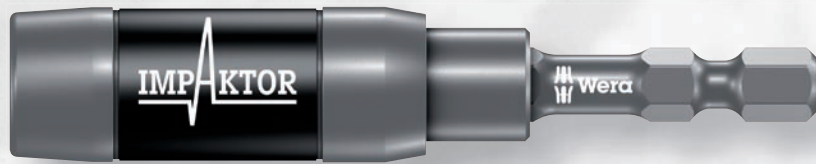

These diamond particles reduce the cam-out effects – particularly high in power tool applications – which can lead to a slipping out of the screw head. The diamond particles literally bite themselves into the screw recess. This means that less contact pressure is required, something that greatly reduces fatigue in power tool screwdriving jobs.

Wera's Impaktor system consisting of Impaktor bits and Impaktor holders is today's necessary addition to the BiTorsion system with the creation of the TriTorsion system.

The Impaktor holder technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry (two coupled torsion zones that perform successively).



The Impaktor stainless steel holder with a retaining ring and magnet satisfies the extreme, dynamic requirements in that there are consciously no small mechanical component parts fitted as they would be more susceptible to failure. It focuses on the basic bit holding function and the cushioning of the extreme impulse peaks with its two different torsion zones. Mainly used in industrial screw assembly applications e.g. with screwdriving.

The Impaktor holder with ring magnet additionally holds longer and heavier screws absolutely securely. This enables a speedy and dependable positioning of the screw. It is also ideal for above-head work. Should the magnet function not be required in a particular situation e.g. when working with metal, it can be extracted from the screwdriving area and can thereby be "disabled". Mainly used in manual power tool applications.

The combination of the double torsion zones in the Impaktor holder and the torsion zone in the Impaktor bit result in the TriTorsion system.



The BiTorsion bit system

Delivers longer service life



Peak forces that occur in power tool applications often result in premature wear of bits or damage to the screw head. This usually occurs during initial torque and when the screw comes to a standstill.

Screwdriving could become more productive and safer if these peak loads could be minimised. The Wera BiTorsion system prevents premature wear. The service life of the tool is extended and the productivity of power tool applications significantly increased.

The effectiveness of the BiTorsion system comes from a combination of two shock-absorbing spring elements. Both bits as well as holders have a cushioning torsion zone that diverts the kinetic energy away from the drive tip during peak loads.

The torsion spring integrated into the unique BiTorsion holder absorbs lower levels of peak loads.

Any overloading of this spring is effectively prevented by means of a supporting mechanism. Higher peak loads are minimised through the torsion effect of the bit shaft (Phase 2). This effect is achieved with a specific heat treatment after the hardening process of the bits. This reduces the hardness of the shaft in comparison to the drive tip.

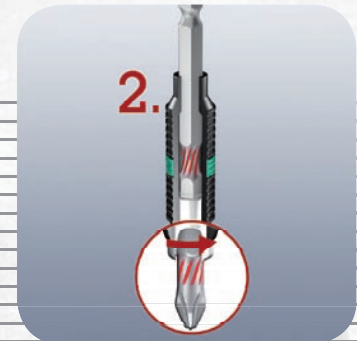

- The BiTorsion tools can also be used individually.
- The BiTorsion holder and the BiTorsion bit can, of course, be used independently of one another.
- Even the service life of conventional bits is enhanced with the use of the BiTorsion holder and the BiTorsion bit also functions in a normal holder.

The optimally coordinated features of the torsion zones on the bit and holder permit a phased yield when under strain. The two-phase system prevents premature wear. Moreover, a long tool service life is also ensured by the hardness of the bits that matches the respective application.

Diamond-coated bits



Bits with "bite"

One of the greatest problems with power tool applications is that the conventional bit easily slips out of the head of the screw (cam-out). This often destroys both the head of the screw and the tool. High resulting costs are incurred from damaged surfaces and screw connections that can no longer be loosened. Screwdriving will become safer and more economic if this problem of slipping can be solved.

To solve this fundamental problem, Wera launched a diamond-coated bit on to the market in 1992.

Today, the Wera diamond bit – manufactured with the technology specifically developed by Wera for this application – still sets the standard in terms of resilience and functionality. Wera bits with a diamond coating ensure a secure fit of the bit in the screw head.

The minute diamond particles applied to the tip of the tool literally "bite" into the screw and ensure an exact, anti-slip fit in the head of the screw. This secure fit protects the screw. The cam-out forces which compel the user to apply greater pressure to the screw are considerably reduced.



Particularly when applications involve sensitive materials or high quality surfaces are involved, bits with a diamond coating ensure that work is done safer, faster and at lower cost.

- Coated with minute diamond particles
- Less contact pressure needed for screwdriving
- Dramatically reduced danger of slipping
- Less wear to bits and screw head
- Safer screwdriving on sensitive surfaces
- Quicker fastening times
- Easily recognisable with their bright gold color and green banderole



Bits



Bits for Phillips Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

851/1 IMP DC Impaktor bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: The Impaktor technology ensures superior service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance

| Code | + | mm | mm | mm |
|-------------|------|----|----|----|
| 05057616001 | PH 2 | 25 | 1" | 10 |
| 05057617001 | PH 3 | 25 | 1" | 10 |

851/1 BDC bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: BiTorsion for long service life, diamond-coated for secure screw fit

| Code | + | mm | mm | mm |
|-------------|------|----|----|----|
| 05056400001 | PH 1 | 25 | 1" | 10 |
| 05056402001 | PH 2 | 25 | 1" | 10 |
| 05056404001 | PH 3 | 25 | 1" | 10 |

Impaktor bits and holder For superior service life

Maximum utilisation of the material properties, a very special geometry – designed particularly to meet the extreme demands – as well a specific manufacturing process mean that Wera Impaktor tools have superior service life.

Another product advantage is the coating of the Impaktor bits with minute diamond particles. These diamond particles reduce the cam-out effects – particularly high in power tool applications – which can lead to a slipping out of the screw head. The diamond particles literally bite themselves into the screw recess. This means that less contact pressure is required, something that greatly delays fatigue setting-in in power tool screwdriving jobs.



851/1 BTH bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: BiTorsion for long service life, extra-hard, ideal for less demanding screwdriving jobs e.g. in wood

| Code | + | mm | mm | mm |
|-------------|------|----|----|----|
| 05056410001 | PH 1 | 25 | 1" | 10 |
| 05056412001 | PH 2 | 25 | 1" | 10 |
| 05056414001 | PH 3 | 25 | 1" | 10 |



851/1 BTZ bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: BiTorsion for long service life, extra-tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | Drive | Length (mm) | Length (in) | Quantity |
|-------------|-------|-------------|-------------|----------|
| 05056420001 | PH 1 | 25 | 1" | 10 |
| 05056422001 | PH 2 | 25 | 1" | 10 |
| 05056424001 | PH 3 | 25 | 1" | 10 |

851/1 A bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Extra-hard, ideal for less demanding screwdriving jobs e.g. in wood, profiled version

| Code | Drive | Length (mm) | Length (in) | Shaft Diameter (mm) | Quantity |
|-------------|-------|-------------|-------------|---------------------|----------|
| 05134918001 | PH 0 | 25 | 1" | 3.0 | 10 |
| 05134919001 | PH 1 | 25 | 1" | 4.5 | 10 |
| 05134920001 | PH 2 | 25 | 1" | 6.0 | 10 |
| 05134921001 | PH 3 | 25 | 1" | - | 10 |

851/1 ADC bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Diamond-coated for secure screw fit, profiled version

| Code | Drive | Length (mm) | Length (in) | Shaft Diameter (mm) | Quantity |
|-------------|-------|-------------|-------------|---------------------|----------|
| 05134940001 | PH 1 | 25 | 1" | 4.5 | 10 |
| 05134941001 | PH 2 | 25 | 1" | 6.0 | 10 |
| 05134942001 | PH 3 | 25 | 1" | - | 10 |

851/1 AH bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Industrial version for optimum torque transfer with increased depth of penetration into the screw recess, 1/4" hexagon over the entire bit length, extra-hard, ideal for less demanding screwdriving jobs e.g. in wood, profiled version

| Code | Drive | Length (mm) | Length (in) | Quantity |
|-------------|-------|-------------|-------------|----------|
| 05380155001 | PH 1 | 25 | 1" | 10 |
| 05380156001 | PH 2 | 25 | 1" | 10 |
| 05380157001 | PH 3 | 25 | 1" | 10 |

851/1 J bits



Application: Phillips screws, optimised for Asian PH screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | Drive | Length (mm) | Length (in) | Shaft Diameter (mm) | Quantity |
|-------------|-------|-------------|-------------|---------------------|----------|
| 05135040001 | PH 00 | 25 | 1" | 2.0 | 10 |
| 05135041001 | PH 0 | 25 | 1" | 2.5 | 10 |
| 05135042001 | PH 1 | 25 | 1" | 3.0 | 10 |

851/1 RDC bits



Application: Drywall screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Reduced shaft diameter, diamond-coated for secure screw fit

| Code | Drive | Length (mm) | Length (in) | Shaft Diameter (mm) | Quantity |
|-------------|-------|-------------|-------------|---------------------|----------|
| 05135008001 | PH 2 | 25 | 1" | 4.2 | 10 |



Bits



Bits for Phillips Screws



1/4"

1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

851/1 RH bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: Reduced shaft diameter, extra-hard, ideal for less demanding screwdriving jobs e.g. in wood, profiled version

| Code | + | mm | mm | mm | |
|-------------|------|----|----|-----|----|
| 05380158001 | PH 1 | 25 | 1" | 4.2 | 10 |
| 05346281002 | PH 2 | 25 | 1" | 4.2 | 10 |

851/1 RZ bits



Application: Drywall screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: Reduced shaft diameter, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | + | mm | mm | mm | |
|-------------|------|----|----|-----|----|
| 05135009001 | PH 2 | 25 | 1" | 4.2 | 10 |

851/1 TH bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: Torsion-style design to reduce premature wear, extra-hard, ideal for less demanding screwdriving jobs e.g. in wood

| Code | + | mm | mm | mm | |
|-------------|------|----|----|----|----|
| 05056605001 | PH 1 | 25 | 1" | | 10 |
| 05056610001 | PH 2 | 25 | 1" | | 10 |
| 05056625001 | PH 3 | 25 | 1" | | 10 |

Why are there Wera bits with a titanium-nitride coating?



Bits are exposed to extreme permanent stress in series manufacturing jobs. Tough bits with an extremely hard and friction-resistant titanium-nitride coating are used in such cases. The combination of tough bits with high elasticity

and an extremely hard surface is ideal for series manufacturing applications e.g. on an assembly line. Wera Bits with a titanium-nitride coating are recognisable through the letters TiN in the article designation (z. B. 851/1 TiN), the gold-colored tip and the steel grey drive.

Wera ABC



By diverting torque peaks into the Torsion zone of the bit, premature wear and tear is avoided and dramatically improved service life is achieved.



851/1 TiN bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: TiN coating for the hardness needed e.g. in series screwdriving operations

| Code | + | mm | | |
|-------------|------|----|----|----|
| 05480171001 | PH 1 | 25 | 1" | 10 |
| 05480172001 | PH 2 | 25 | 1" | 10 |
| 05480173001 | PH 3 | 25 | 1" | 10 |


851/1 TZ bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Torsion-style design to reduce premature wear, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | + | mm | | |
|-------------|------|----|----|----|
| 05056505001 | PH 1 | 25 | 1" | 10 |
| 05056510001 | PH 2 | 25 | 1" | 10 |
| 05056525001 | PH 3 | 25 | 1" | 10 |

Wera ABC



Z Bits

Tough bits for hard materials e.g. sheet steel or metal. In this case the screw initially turns smoothly inside the defined thread. As soon as the head of the screw touches the material surface, high torque peaks

are generated that have an affect on the screw and tool. This can mean that the bit breaks if it is too hard.

Tough Wera bits prevent any premature breakage of the drive tip. Recognisable in the catalog through the article letter Z.

851/1 Z bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | + | mm | | |
|-------------|------|----|--------|----|
| 05056500001 | PH 0 | 25 | 1" | 10 |
| 05072070001 | PH 1 | 25 | 1" | 10 |
| 05056507001 | PH 1 | 50 | 2" | 10 |
| 05072072001 | PH 2 | 25 | 1" | 10 |
| 05056515001 | PH 2 | 32 | 1 1/4" | 10 |
| 05056520001 | PH 2 | 50 | 2" | 10 |
| 05072074001 | PH 3 | 25 | 1" | 10 |
| 05056530001 | PH 3 | 32 | 1 1/4" | 10 |
| 05134905001 | PH 3 | 50 | 2" | 10 |
| 05056535001 | PH 4 | 32 | 1 1/4" | 10 |

853/1 TZ bits, ACR



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Torsion-style design to reduce premature wear, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal, ACR (Anti Cam-Out Ribs) prevents bits from slipping out of screw head

| Code | + | mm | | |
|-------------|------|----|----|----|
| 05056660001 | PH 1 | 25 | 1" | 10 |
| 05056662001 | PH 2 | 25 | 1" | 10 |
| 05056664001 | PH 3 | 25 | 1" | 10 |





Bits for Phillips Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

851/4 IMP DC Impaktor bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: The Impaktor technology ensures superior service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance

| Code | mm | mm | mm |
|-------------|------|----|----|
| 05057656001 | PH 2 | 50 | 2" |
| 05057657001 | PH 3 | 50 | 2" |

851/4 BDC bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: BiTorsion for long service life, diamond-coated for secure screw fit

| Code | mm | mm | mm |
|-------------|------|----|----|
| 05059530001 | PH 1 | 50 | 2" |
| 05059532001 | PH 2 | 50 | 2" |
| 05059534001 | PH 3 | 50 | 2" |

851/4 BTH bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: BiTorsion for long service life, extra-hard, ideal for less demanding screwdriving jobs e.g. in wood

| Code | mm | mm | mm |
|-------------|------|----|----|
| 05059540001 | PH 1 | 50 | 2" |
| 05059542001 | PH 2 | 50 | 2" |
| 05059544001 | PH 3 | 50 | 2" |

851/4 BTZ bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: BiTorsion for long service life, extra-tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm |
|-------------|------|----|----|
| 05059550001 | PH 1 | 50 | 2" |
| 05059552001 | PH 2 | 50 | 2" |
| 05059554001 | PH 3 | 50 | 2" |

851/4 A bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Extra-hard, ideal for less demanding screwdriving jobs e.g. in wood, profiled version

| Code | mm | mm | mm |
|---------------------------|------|-----|--------|
| 05134929001 | PH 0 | 50 | 2" |
| 05134906001 | PH 0 | 70 | 2 3/4" |
| 05134907001 | PH 0 | 89 | 3 1/2" |
| 05134908001 | PH 0 | 152 | 6" |
| 05134930001 | PH 1 | 50 | 2" |
| 05134370001 | PH 1 | 70 | 2 3/4" |
| 05134372001 | PH 1 | 89 | 3 1/2" |
| 05134909001 | PH 1 | 152 | 6" |
| 05134931001 | PH 2 | 50 | 2" |
| 05134371001 | PH 2 | 70 | 2 3/4" |
| 05134373001 | PH 2 | 89 | 3 1/2" |
| 05134910001 ¹⁾ | PH 2 | 152 | 6" |
| 05134911001 ²⁾ | PH 2 | 152 | 6" |
| 05134932001 | PH 3 | 50 | 2" |
| 05134912001 | PH 3 | 50 | 2" |
| 05134913001 | PH 3 | 70 | 2 3/4" |
| 05134914001 | PH 3 | 89 | 3 1/2" |
| 05134915001 | PH 3 | 152 | 6" |
| 05160983002 | PH 4 | 50 | 2" |

¹⁾ Length of drive 100 mm

²⁾ Length of drive 20 mm



851/4 ADC bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Extra-hard, ideal for less demanding screwdriving jobs e.g. in wood, diamond-coated for secure screw fit, profiled version

| Code | + | mm | mm | mm | |
|-------------|------|----|----|-----|----|
| 05134950001 | PH 1 | 50 | 2" | 4.5 | 10 |
| 05134951001 | PH 2 | 50 | 2" | 6 | 10 |
| 05134952001 | PH 3 | 50 | 2" | - | 10 |

851/4 J bits



Application: Phillips screws, optimised for Asian PH screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | + | mm | mm | mm | |
|-------------|-------|----|--------|-----|----|
| 05135530001 | PH 00 | 50 | 2" | 2.0 | 10 |
| 05380200001 | PH 00 | 89 | 3 1/2" | 2.0 | 10 |
| 05135531001 | PH 0 | 50 | 2" | 2.5 | 10 |
| 05380201001 | PH 0 | 89 | 3 1/2" | 2.5 | 10 |
| 05135532001 | PH 1 | 50 | 2" | 4.5 | 10 |
| 05380202001 | PH 1 | 89 | 3 1/2" | 4.5 | 10 |

JCIS profile

Bits with the ending J are especially designed for small drive applications in accordance with the Japanese Camera Standard. They permit a better fit in the screw as per this standard. However, these screws are not only to be found in cameras, but are also used in many electrical appliances.

851/4 RH Reduced tip bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Reduced shaft diameter, extra-hard, ideal for less demanding screwdriving jobs e.g. in wood

| Code | + | mm | mm | mm | |
|-------------|------|----|----|-----|----|
| 05380160001 | PH 1 | 50 | 2" | 4.2 | 10 |
| 05380161001 | PH 2 | 50 | 2" | 4.2 | 10 |

851/4 Reduced tip bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Reduced shaft diameter, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | + | mm | mm | mm | |
|-------------|------|-----|----|-----|----|
| 05160899001 | PH 2 | 50 | 2" | 3.0 | 10 |
| 05160896001 | PH 2 | 152 | 6" | 3.0 | 10 |

Bits with reduced shaft diameter.

Bits with reduced shaft diameter ensure that screws can be sunk without damaging the surface. This is particularly necessary in drywall construction applications.





Bits for Phillips Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

851/4 TH bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Torsion-style design to reduce premature wear, extra-hard, ideal for less demanding screwdriving jobs e.g. in wood

| Code | + | mm | mm | |
|-------------|------|----|----|----|
| 05059855001 | PH 1 | 50 | 2" | 10 |
| 05059860001 | PH 2 | 50 | 2" | 10 |
| 05059865001 | PH 3 | 50 | 2" | 10 |


851/4 TZ bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Torsion-style design to reduce premature wear, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | + | mm | mm | |
|-------------|------|----|----|----|
| 05059805001 | PH 1 | 50 | 2" | 10 |
| 05059810001 | PH 2 | 50 | 2" | 10 |
| 05059815001 | PH 3 | 50 | 2" | 10 |

Wera ABC



Z Bits

Tough bits for hard materials e.g. sheet steel or metal. In this case the screw initially turns smoothly inside the defined thread. As soon as the head of the screw touches the material surface, high torque peaks

are generated that have an affect on the screw and tool. This can mean that the bit breaks if it is too hard. Tough Wera bits prevent any premature breakage of the drive tip. Recognisable in the catalog through the article letter Z.

851/4 Z bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | + | mm | mm | mm | |
|-------------|------|-----|--------|-----|----|
| 05059755001 | PH 1 | 70 | 2 3/4" | 4.5 | 10 |
| 05059760001 | PH 1 | 89 | 3 1/2" | 4.5 | 10 |
| 05059765001 | PH 1 | 127 | 5" | 4.5 | 10 |
| 05059766001 | PH 1 | 152 | 6" | 4.5 | 10 |
| 05059770001 | PH 2 | 70 | 2 3/4" | 6.0 | 10 |
| 05059775001 | PH 2 | 89 | 3 1/2" | 6.0 | 10 |
| 05059780001 | PH 2 | 110 | 4 3/8" | 6.0 | 10 |
| 05059785001 | PH 2 | 127 | 5" | 6.0 | 10 |
| 05059786001 | PH 2 | 152 | 6" | 6.0 | 10 |
| 05059790001 | PH 3 | 70 | 2 3/4" | - | 10 |
| 05059795001 | PH 3 | 89 | 3 1/2" | - | 10 |
| 05059800001 | PH 3 | 110 | 4 3/8" | - | 10 |
| 05059802001 | PH 3 | 152 | 6" | - | 10 |

853/4 ACR bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal, ACR (Anti Cam-Out Ribs) prevents bit from slipping out of screw head

| Code | + | mm | mm | mm | |
|-------------|------|----|----|-----|----|
| 05346285001 | PH 1 | 50 | 2" | 3.5 | 10 |
| 05346286001 | PH 2 | 50 | 2" | 5.2 | 10 |
| 05346287001 | PH 3 | 50 | 2" | 5.8 | 10 |

853/4 Harpoon ACR bits



Application: Phillips screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Reduced shaft diameter, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal, ACR (Anti Cam-Out Ribs) prevents bit from slipping out of screw head

| Code | + | mm | mm | mm | |
|-------------|------|-----|--------|-----|----|
| 05160901001 | PH 2 | 50 | 2" | 3.3 | 10 |
| 05160895001 | PH 2 | 70 | 2 3/4" | 3.3 | 10 |
| 05160908001 | PH 2 | 152 | 6" | 3.3 | 10 |









3 mm hexagon drive, suitable for B 3 bit holders (series 00)



851/00 Z bits




Application: Phillips screws
Drive: 3 mm hexagon, suitable for DIN 3126-B 3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| Code | | mm | | mm | |
| 05055600001 | PH 00 | 50 | 2" | 2.5 | 10 |
| 05055605001 | PH 0 | 50 | 2" | 2.3 | 10 |
| 05055610001 | PH 1 | 50 | 2" | 4.0 | 10 |

851/00 J bits



Application: Phillips screws, optimised for Asian PH screws
Drive: 3 mm hexagon, suitable for DIN 3126-B 3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| Code | | mm | | mm | |
| 05135030001 | PH 00 | 50 | 2" | 1.8 | 10 |
| 05135031001 | PH 0 | 50 | 2" | 2.0 | 10 |
| 05135032001 | PH 1 | 50 | 2" | 2.5 | 10 |






5/16" hexagon drive, suitable for D 8 bit holders or direct drive (series 2)



851/2 Z bits



Application: Phillips screws
Drive: 5/16" hexagon, suitable for DIN 3126-D 8, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| Code | | mm | | mm | |
| 05057705001 | PH 1 | 32 | 1 1/4" | 4.5 | 10 |
| 05057710001 | PH 2 | 32 | 1 1/4" | 6.0 | 10 |
| 05057715001 | PH 3 | 32 | 1 1/4" | 7.6 | 10 |
| 05057720001 | PH 4 | 32 | 1 1/4" | - | 10 |
| 05057725001 | PH 4 | 38 | 1 1/2" | 10.0 | 10 |



Bits



Bits for Phillips Screws



7/16" direct drive hexagon (series 7)

851/7 H bits



Application: Phillips screws
Drive: 7/16" hexagon, suitable for power tools with DIN 3126-F 11.2, ISO 1173 chuck
Design: Extra-hard, ideal for less demanding screwdriving jobs e.g. in wood

| Code | + | mm | mm | mm | |
|-------------|------|----|--------|------|---|
| 05380214001 | PH 2 | 89 | 3 1/2" | 6.0 | 5 |
| 05380215001 | PH 3 | 89 | 3 1/2" | 8.0 | 5 |
| 05380216001 | PH 4 | 89 | 3 1/2" | 10.0 | 5 |

851/7 Z bits




Application: Phillips screws
Drive: 7/16" hexagon, suitable for power tools with DIN 3126-F 11.2, ISO 1173 chuck
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | + | mm | mm | mm | |
|-------------|------|----|----|------|---|
| 05062805001 | PH 1 | 75 | 3" | 4.5 | 5 |
| 05062810001 | PH 2 | 75 | 3" | 6.0 | 5 |
| 05062815001 | PH 3 | 75 | 3" | 8.0 | 5 |
| 05062820001 | PH 4 | 75 | 3" | 10.0 | 5 |

H bits

Extra-hard bits for semi-hard materials e.g. wood. Torque increases continuously during screwdriving operations – without any abrupt occurrence of peak loads – until the screw head reaches the material surface. Extra-hard bits are made from a special material that extends the service life of the tool and reduces the danger of material breakage. Recognisable in the catalog through the article letter H. The extra-hard bits can be identified with their dark yellow color.

Wera ABC



Z Bits

Tough bits for hard materials e.g. sheet steel or metal. In this case the screw initially turns smoothly inside the defined thread.

As soon as the head of the screw touches the material surface, high torque peaks are generated that have an affect on the screw and tool. This can mean that the bit breaks if it is too hard. Tough Wera bits prevent any premature breakage of the drive tip. Recognisable in the catalog through the article letter Z.



Thread drive $10/32$ " NF2A direct drive (series 16)



851/16 Bits



Application: Phillips screws
Drive: Thread drive $10/32$ " NF2A
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | + | mm | mm | mm | |
|-------------|------|------|-------------------|-----|---|
| 05065195001 | PH 1 | 44.5 | $1 \frac{3}{4}$ " | 5.5 | 5 |
| 05065197001 | PH 2 | 44.5 | $1 \frac{3}{4}$ " | 6.0 | 5 |

851/16 BH Bits



Application: Phillips recess screws
Drive: Thread drive $10/32$ " NF2A with bolster for inserting the thread drive into the chuck of a drill
Design: Hard

| Code | + | mm | mm | mm | |
|-------------|------|----|---------------------|-----|---|
| 05380217001 | PH 1 | 38 | $1 \frac{1}{2}$ " | 5.5 | 5 |
| 05380221001 | PH 1 | 46 | $1 \frac{13}{16}$ " | 5.5 | 5 |
| 05380218001 | PH 2 | 38 | $1 \frac{1}{2}$ " | 6.0 | 5 |
| 05380220001 | PH 2 | 46 | $1 \frac{13}{16}$ " | 6.0 | 5 |
| 05380219001 | PH 3 | 38 | $1 \frac{1}{2}$ " | 8.0 | 5 |

4 mm Halfmoon direct drive (series 9)



851/9 C PH bits, halfmoon



Application: Phillips screws
Drive: Halfmoon, 4 mm
Design: JCIS (Japanese Camera Industrial Standard), hard

| Code | + | mm | mm | mm | mm | | |
|-------------|-------|----|---------------------|-----|----|-------------------|----|
| 05135270001 | PH 00 | 44 | $1 \frac{47}{64}$ " | 1.8 | 20 | $\frac{25}{32}$ " | 10 |
| 05135271001 | PH 00 | 64 | $2 \frac{33}{64}$ " | 1.8 | 20 | $\frac{25}{32}$ " | 10 |
| 05135272001 | PH 0 | 44 | $1 \frac{47}{64}$ " | 1.8 | 20 | $\frac{25}{32}$ " | 10 |
| 05135273001 | PH 0 | 64 | $2 \frac{33}{64}$ " | 1.8 | 20 | $\frac{25}{32}$ " | 10 |
| 05135274001 | PH 0 | 44 | $1 \frac{47}{64}$ " | 2.0 | 20 | $\frac{25}{32}$ " | 10 |
| 05135275001 | PH 0 | 64 | $2 \frac{33}{64}$ " | 2.0 | 20 | $\frac{25}{32}$ " | 10 |
| 05135276001 | PH 1 | 44 | $1 \frac{47}{64}$ " | 3.0 | 20 | $\frac{25}{32}$ " | 10 |
| 05135277001 | PH 1 | 64 | $2 \frac{33}{64}$ " | 3.0 | 20 | $\frac{25}{32}$ " | 10 |



Bits



Bits for Phillips Screws



4 mm HIOS direct drive (series 21)

851/21 PH/JCIS bits



Application: Phillips screws
Drive: HIOS 4 mm
Design: JCIS (Japanese Camera Industrial Standard), hard

| Code | | mm | mm | mm | |
|-------------|-------|----|---------|-----|----|
| 05135280001 | PH 00 | 40 | 1 9/16" | 1.8 | 10 |
| 05135281001 | PH 00 | 60 | 2 3/8" | 1.8 | 10 |
| 05135284001 | PH 0 | 40 | 1 9/16" | 1.8 | 10 |
| 05135285001 | PH 0 | 60 | 2 3/8" | 1.8 | 10 |
| 05135286001 | PH 0 | 40 | 1 9/16" | 2.0 | 10 |
| 05135287001 | PH 0 | 60 | 2 3/8" | 2.0 | 10 |
| 05135288001 | PH 0 | 40 | 1 9/16" | 2.5 | 10 |
| 05135289001 | PH 0 | 60 | 2 3/8" | 2.5 | 10 |
| 05135290001 | PH 1 | 40 | 1 9/16" | 3.0 | 10 |
| 05135291001 | PH 1 | 60 | 2 3/8" | 3.0 | 10 |
| 05135292001 | PH 2 | 40 | 1 9/16" | - | 10 |



5 mm HIOS direct drive (series 22)

851/22 PH/JCIS bits



Application: Phillips screws
Drive: HIOS 5 mm
Design: JCIS (Japanese Camera Industrial Standard), hard

| Code | | mm | mm | mm | mm | mm | |
|-------------|-------|-----|--------|-----|----|--------|----|
| 05135380001 | PH 00 | 60 | 2 3/8" | 2.0 | 20 | 25/32" | 10 |
| 05135381001 | PH 0 | 60 | 2 3/8" | 2.0 | 20 | 25/32" | 10 |
| 05135382001 | PH 0 | 80 | 3 1/8" | 2.0 | 20 | 25/32" | 10 |
| 05135383001 | PH 0 | 60 | 2 3/8" | 2.5 | 20 | 25/32" | 10 |
| 05135384001 | PH 0 | 80 | 3 1/8" | 2.5 | 20 | 25/32" | 10 |
| 05135385001 | PH 1 | 60 | 2 3/8" | 3.0 | 20 | 25/32" | 10 |
| 05135386001 | PH 1 | 80 | 3 1/8" | 3.0 | 20 | 25/32" | 10 |
| 05135387001 | PH 1 | 100 | 4" | 3.0 | 20 | 25/32" | 10 |



5/16" external square drive (series 25)








851/25 H bits



Application: Phillips screws

Drive: 5/16" external square

Design: Extra-hard, ideal for less demanding screwdriving jobs e.g. in wood

|  |  |  |  |  |
|---|---|---|---|---|
| Code | | mm | | |
| 05380380001 | PH 1 | 29 | 1 3/16" | 10 |
| 05380381001 | PH 2 | 29 | 1 3/16" | 10 |
| 05380382001 | PH 3 | 29 | 1 3/16" | 10 |
| 05380383001 | PH 4 | 29 | 1 3/16" | 10 |

H bits

Extra-hard bits for semi-hard materials e.g. wood. Torque increases continuously during screwdriving operations – without any abrupt occurrence of peak loads – until the screw head reaches the material surface. Extra-hard bits are made from a special material that extends the service life of the tool and reduces the danger of material breakage. Recognisable in the catalog through the article letter H. The extra-hard bits can be identified with their dark yellow color.



Bits



Bits for Pozidriv Screws



1/4" hexagon drive, suitable for D 6.3 bit holders
(series 1)

855/1 IMP DC Impaktor bits



Application: Suitable for Pozidriv[®] screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: The Impaktor technology ensures superior service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance

| Code | mm | 1" | 10 |
|-------------|---------|----|----|
| 05057621001 | PZ 2 25 | 1" | 10 |
| 05057622001 | PZ 3 25 | 1" | 10 |

¹ Pozidriv = reg. trademark of Phillips Screw Company.

855/1 BDC bits



Application: Suitable for Pozidriv[®] screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: BiTorsion for long service life, diamond-coated for secure screw fit

| Code | mm | 1" | 10 |
|-------------|---------|----|----|
| 05056700001 | PZ 1 25 | 1" | 10 |
| 05056702001 | PZ 2 25 | 1" | 10 |
| 05056704001 | PZ 3 25 | 1" | 10 |

¹ Pozidriv = reg. trademark of Phillips Screw Company.

855/1 TH bits



Application: Suitable for Pozidriv[®] screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Torsion-style design to reduce premature wear, extra-hard, ideal for less demanding screwdriving jobs e.g. in wood

| Code | mm | 1" | 10 |
|-------------|---------|----|----|
| 05056910001 | PZ 1 25 | 1" | 10 |
| 05056915001 | PZ 2 25 | 1" | 10 |
| 05056925001 | PZ 3 25 | 1" | 10 |

¹ Pozidriv = reg. trademark of Phillips Screw Company.

855/1 Z bits



Application: Suitable for Pozidriv[®] screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | 1" | 10 |
|-------------|---------|--------|----|
| 05072080001 | PZ 1 25 | 1" | 10 |
| 05072082001 | PZ 2 25 | 1" | 10 |
| 05072084001 | PZ 3 25 | 1" | 10 |
| 05056835001 | PZ 4 32 | 1 1/4" | 10 |

¹ Pozidriv = reg. trademark of Phillips Screw Company.



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)



855/4 IMP DC Impaktor bits



Application: Suitable for Pozidriv[®] screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: The Impaktor technology ensures superior service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance

| Code | mm | mm | mm |
|-------------|------|----|----|
| 05057661001 | PZ 2 | 50 | 2" |
| 05057662001 | PZ 3 | 50 | 2" |

¹ Pozidriv = reg. trademark of Phillips Screw Company.

855/4 BDC bits



Application: Suitable for Pozidriv[®] screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: BiTorsion for long service life, diamond-coated for secure screw fit

| Code | mm | mm | mm |
|-------------|------|----|----|
| 05059900001 | PZ 1 | 50 | 2" |
| 05059902001 | PZ 2 | 50 | 2" |
| 05059904001 | PZ 3 | 50 | 2" |


¹ Pozidriv = reg. trademark of Phillips Screw Company.

Impaktor bits and holder

For superior service life

Maximum utilisation of the material properties, a very special geometry – designed particularly to meet the extreme demands – as well a specific manufacturing process mean that Wera Impaktor tools have superior service life.

Another product advantage is the coating of the Impaktor bits with minute diamond particles. These diamond particles reduce the cam-out effects – particularly high in power tool applications – which can lead to a slipping out of the screw head. The diamond particles literally bite themselves into the screw recess. This means that less contact pressure is required, something that greatly delays fatigue setting-in in power tool screwdriving jobs.



855/4 TH bits



Application: Suitable for Pozidriv[®] screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Torsion-style design to reduce premature wear, extra-hard, ideal for less demanding screwdriving jobs e.g. in wood

| Code | mm | mm | mm |
|-------------|------|----|----|
| 05060055001 | PZ 1 | 50 | 2" |
| 05060060001 | PZ 2 | 50 | 2" |
| 05060065001 | PZ 3 | 50 | 2" |

¹ Pozidriv = reg. trademark of Phillips Screw Company.





Bits for Pozidriv Screws



1/4"

1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

855/4 TZ bits

TORSION



Application: Suitable for Pozidriv[®] screws

Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders

Design: Torsion-style design to reduce premature wear, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | Star Icon | mm | mm | mm | mm |
|-------------|-----------|----|----|----|----|
| 05060005001 | PZ 1 | 50 | 2" | | 10 |
| 05060010001 | PZ 2 | 50 | 2" | | 10 |
| 05060015001 | PZ 3 | 50 | 2" | | 10 |

¹ Pozidriv = reg. trademark of Phillips Screw Company.

855/4 Z bits



Application: Suitable for Pozidriv[®] screws


Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | Star Icon | mm | mm | mm | mm |
|-------------|-----------|-----|--------|-----|----|
| 05060027001 | PZ 1 | 70 | 2 3/4" | 4.5 | 10 |
| 05060029001 | PZ 1 | 89 | 3 1/2" | 4.5 | 10 |
| 05060031001 | PZ 1 | 127 | 5" | 4.5 | 10 |
| 05060030001 | PZ 1 | 152 | 6" | 4.5 | 10 |
| 05060033001 | PZ 2 | 70 | 2 3/4" | 6.0 | 10 |
| 05060035001 | PZ 2 | 89 | 3 1/2" | 6.0 | 10 |
| 05060037001 | PZ 2 | 110 | 4 3/8" | 6.0 | 10 |
| 05060036001 | PZ 2 | 127 | 5" | 6.0 | 10 |
| 05060038001 | PZ 2 | 152 | 6" | 6.0 | 10 |
| 05060041001 | PZ 3 | 70 | 2 3/4" | - | 10 |
| 05060043001 | PZ 3 | 89 | 3 1/2" | - | 10 |
| 05060045001 | PZ 3 | 110 | 4 3/8" | - | 10 |
| 05060047001 | PZ 3 | 152 | 6" | - | 10 |

¹ Pozidriv = reg. trademark of Phillips Screw Company.

Wera ABC



Z Bits

Tough bits for hard materials e.g. sheet steel or metal. In this case the screw initially turns smoothly inside the defined thread. As soon as the head of the screw touches the material surface, high torque peaks

are generated that have an affect on the screw and tool. This can mean that the bit breaks if it is too hard.

Tough Wera bits prevent any premature breakage of the drive tip. Recognisable in the catalog through the article letter Z.



3 mm hexagon drive, suitable for B 3 bit holders (series 00)



855/00 Z bits



Application: Suitable for Pozidriv[®] screws
Drive: 3 mm hexagon, suitable for DIN 3126-B 3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | | mm | mm | mm | |
|-------------|------|----|----|-----|----|
| 05055805001 | PZ 0 | 50 | 2" | 3.0 | 10 |
| 05055810001 | PZ 1 | 50 | 2" | 4.0 | 10 |

¹⁾ Pozidriv = reg. trademark of Phillips Screw Company.

Thread drive ¹⁰/₃₂" NF2A direct drive (series 16)



855/16 Bits



Application: Suitable for Pozidriv[®] screws
Drive: Thread drive ¹⁰/₃₂" NF2A
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | | mm | mm | mm | |
|-------------|------|------|---------------------------------|-----|---|
| 05065205001 | PZ 1 | 44.5 | 1 ³ / ₄ " | 5.5 | 5 |
| 05065207001 | PZ 2 | 44.5 | 1 ³ / ₄ " | 6.0 | 5 |



Bits



Bits for PlusMinus Screws (Slotted/Phillips)



1/4"

1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)







851/4 PH/S PlusMinus bits




Application: PlusMinus screws (Phillips/slotted)

Drive: 1/4" hexagon suitable for DIN 3126-F 6.3, ISO 1173 bit holders

Design: PlusMinus (Phillips/slotted), tough, ideal for electrical component adjustment jobs e.g. in sheet steel or metal

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| Code | | mm | | mm | |
| 05059720001 | # 1 | 70 | 2 3/4" | 4.5 | 10 |
| 05059721001 | # 2 | 70 | 2 3/4" | 6 | 10 |

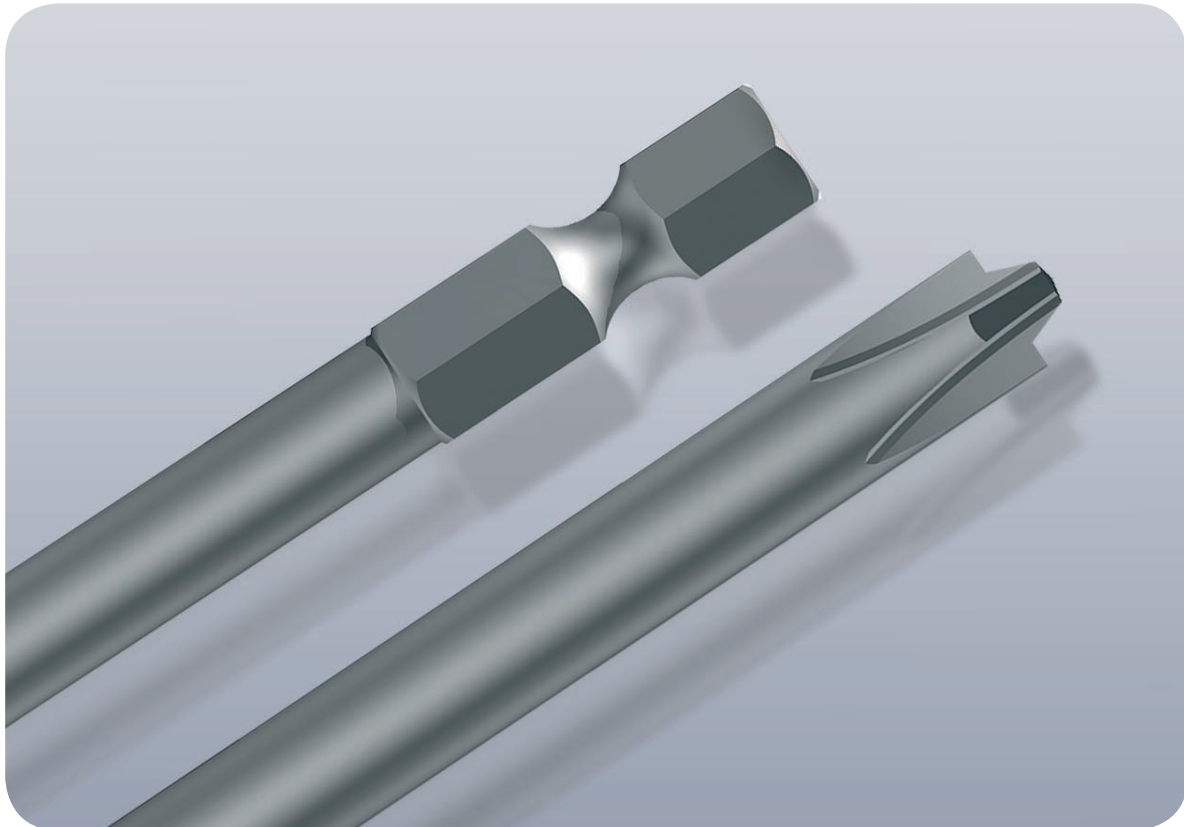


Bits for PlusMinus Screws (Slotted/Pozidriv)





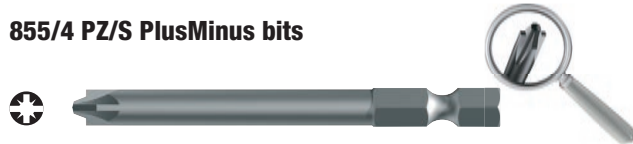

1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)




855/4 PZ/S PlusMinus bits



Application: PlusMinus (Pozidriv[†]/slotted) screws
Drive: 1/4" hexagon suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: PlusMinus (slotted/Pozidriv[†]), tough, ideal for electrical component adjustment jobs e.g. in sheet steel or metal

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| Code | | mm | mm | mm | |
| 05059896001 | # 1 | 70 | 2 3/4" | 4.5 | 10 |
| 05059897001 | # 2 | 70 | 2 3/4" | 6 | 10 |

[†] Pozidriv = reg. trademark of Phillips Screw Company.

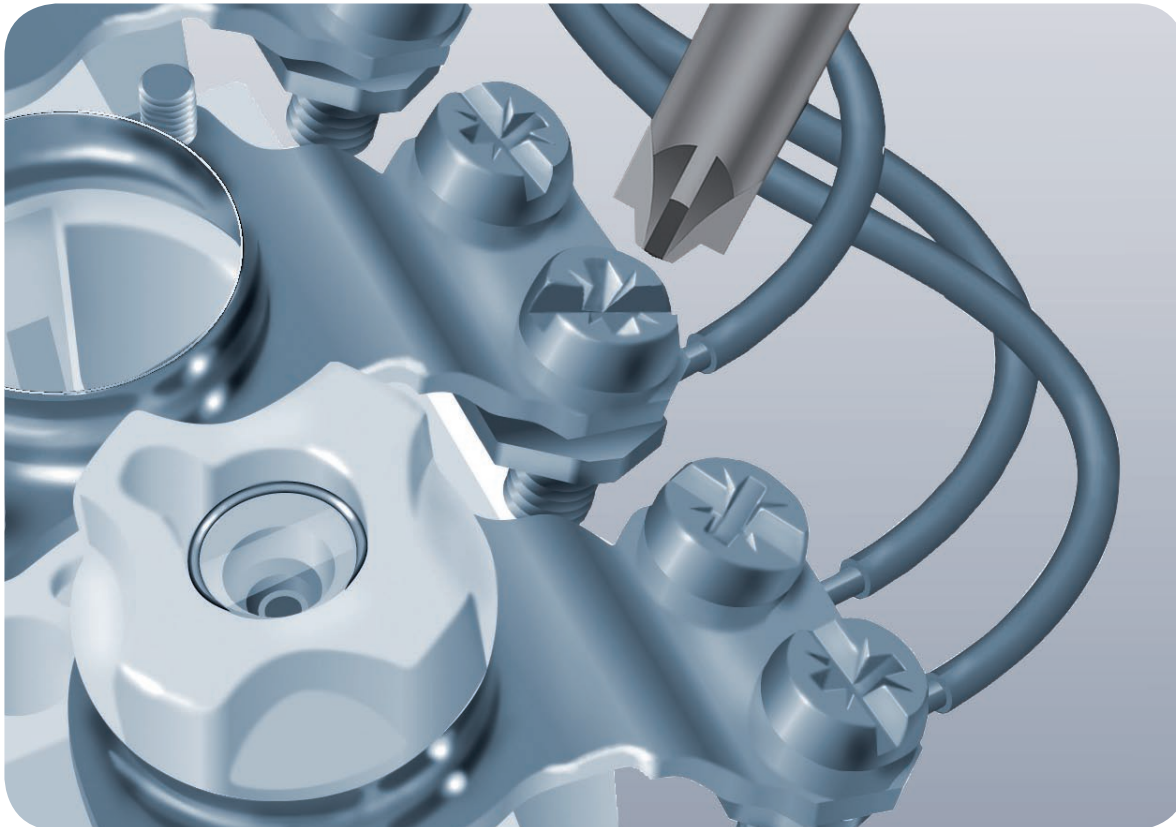

PlusMinus profile

In electrical industries a mix of slotted and cross-recess screws is quite predominant. Commonly, a combination of slot and Pozidriv or slot and Phillips are used in equipment such as consumer units containing MCB's, panels and assemblies. Optimal work on these screws is possible with the PlusMinus profile.



Bits for TORX® Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

867/1 IMP DC Impaktor TORX® bits




Application: TORX® socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: The Impaktor technology ensures superior service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance

| Code | Icon | mm | 1" | Icon |
|-------------|-------|----|----|------|
| 05057625001 | TX 25 | 25 | 1" | 10 |
| 05057626001 | TX 30 | 25 | 1" | 10 |
| 05057627001 | TX 40 | 25 | 1" | 10 |

Impaktor bits and holder For superior service life

Maximum utilisation of the material properties, a very special geometry – designed particularly to meet the extreme demands – as well as a specific manufacturing process mean that Wera Impaktor tools have superior service life.

Another product advantage is the coating of the Impaktor bits with minute diamond particles. These diamond particles reduce the cam-out effects – particularly high in power tool applications – which can lead to a slipping out of the screw head. The diamond particles literally bite themselves into the screw recess. This means that less contact pressure is required, something that greatly delays fatigue setting-in in power tool screwdriving jobs.





867/1 BDC TORX® bits



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: BiTorsion for long service life, diamond-coated for secure screw fit

| Code | mm | mm | mm | mm |
|-------------|-------|----|----|----|
| 05066100001 | TX 10 | 25 | 1" | 10 |
| 05066102001 | TX 15 | 25 | 1" | 10 |
| 05066104001 | TX 20 | 25 | 1" | 10 |
| 05066106001 | TX 25 | 25 | 1" | 10 |
| 05066108001 | TX 30 | 25 | 1" | 10 |
| 05066110001 | TX 40 | 25 | 1" | 10 |

867/1 BTZ TORX® bits




Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: BiTorsion for long service life, extra-tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm |
|-------------|-------|----|----|----|
| 05066120001 | TX 10 | 25 | 1" | 10 |
| 05066122001 | TX 15 | 25 | 1" | 10 |
| 05066124001 | TX 20 | 25 | 1" | 10 |
| 05066126001 | TX 25 | 25 | 1" | 10 |
| 05066128001 | TX 30 | 25 | 1" | 10 |
| 05066130001 | TX 40 | 25 | 1" | 10 |

Wera ABC BiTorsion



Longer service life with the Wera BiTorsion system.

Bits and holders wear quickly when exposed to enormous peak loads in power tool screwdriving operations. BiTorsion tools from Wera have special heat-treated torsion zones that, in the case of bits, have a lower

hardness than the shaft tip. They cushion these peak loads. This prevents premature breakage and distinctly extends the service life. Wera BiTorsion bits are recognisable through the letter B in the article designation (e.g. 855/1 BDC), their gold colour and the green banderole. They are available in the versions: Tough (BTZ), hard (BTH) and with diamond coating (BDC).



Bits



Bits for TORX® Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

867/1 Z TORX® HF bits with holding function



Application: TORX® socket screws made according to Acument Intellectual Properties specifications

Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders

Design: Holding function for TORX® screws, tough

| Code | Star Icon | mm | mm | mm | Box Icon |
|-------------|-----------|----|----|-----|----------|
| 05066070001 | TX 8 | 25 | 1" | 2.2 | 10 |
| 05066071001 | TX 9 | 25 | 1" | 2.4 | 10 |
| 05066072001 | TX 10 | 25 | 1" | 2.5 | 10 |
| 05066073001 | TX 15 | 25 | 1" | 3.0 | 10 |
| 05066074001 | TX 20 | 25 | 1" | 3.7 | 10 |
| 05066075001 | TX 25 | 25 | 1" | 4.1 | 10 |
| 05066076001 | TX 27 | 25 | 1" | 4.8 | 10 |
| 05066077001 | TX 30 | 25 | 1" | 5.4 | 10 |
| 05066078001 | TX 40 | 25 | 1" | 6.5 | 10 |

867/1 TZ TORX® bits



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: Torsion-style design to reduce premature wear, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | Star Icon | mm | mm | mm | Box Icon |
|-------------|-----------|----|----|-----|----------|
| 05066300001 | TX 5 | 25 | 1" | 4.2 | 10 |
| 05066301001 | TX 6 | 25 | 1" | 4.2 | 10 |
| 05066302001 | TX 7 | 25 | 1" | 4.2 | 10 |
| 05066303001 | TX 8 | 25 | 1" | 4.2 | 10 |
| 05066304001 | TX 9 | 25 | 1" | 4.2 | 10 |
| 05066305001 | TX 10 | 25 | 1" | 4.2 | 10 |
| 05066308001 | TX 15 | 25 | 1" | 4.2 | 10 |
| 05066310001 | TX 20 | 25 | 1" | 4.8 | 10 |
| 05066312001 | TX 25 | 25 | 1" | 5.5 | 10 |
| 05066313001 | TX 27 | 25 | 1" | 5.5 | 10 |
| 05066315001 | TX 30 | 25 | 1" | 6.0 | 10 |
| 05066320001 | TX 40 | 25 | 1" | - | 10 |



What is the purpose of the TORX® HF profile?



In tight assembly or disassembly situations, for example in engine compartments, it is not possible to securely hold the screw with the hand on the screwdriver, and the screw subsequently often gets lost. Lengthy searches or the loss of the

screw (with the associated danger that could bring about) are the consequence. The TORX® HF tools developed by Wera are ideal because they feature an optimised geometry of the original TORX® profile. The wedging forces resulting from the surface pressure between the drive tip and the screw profile mean that the screw is securely held on the tool!

Wera ABC



By diverting torque peaks into the Torsion zone of the bit, premature wear and tear is avoided and dramatically improved service life is achieved.



867/1 Z TORX® bits



Application: TORX® socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | Icon | mm | mm | mm | Icon |
|-------------|-------|----|--------|------|------|
| 05066492001 | TX 5 | 25 | 1" | 3.0 | 10 |
| 05066493001 | TX 6 | 25 | 1" | 3.0 | 10 |
| 05066494001 | TX 7 | 25 | 1" | 3.0 | 10 |
| 05066495001 | TX 8 | 25 | 1" | 3.0 | 10 |
| 05066496001 | TX 9 | 25 | 1" | 3.0 | 10 |
| 05066485001 | TX 10 | 25 | 1" | 4.0 | 10 |
| 05066486001 | TX 15 | 25 | 1" | 4.0 | 10 |
| 05066487001 | TX 20 | 25 | 1" | 5.0 | 10 |
| 05066488001 | TX 25 | 25 | 1" | 5.0 | 10 |
| 05066489001 | TX 27 | 25 | 1" | 6.0 | 10 |
| 05066490001 | TX 30 | 25 | 1" | 6.0 | 10 |
| 05066491001 | TX 40 | 25 | 1" | - | 10 |
| 05066325001 | TX 45 | 35 | 1 3/8" | 8.0 | 10 |
| 05066330001 | TX 50 | 35 | 1 3/8" | 9.0 | 10 |
| 05066335001 | TX 55 | 35 | 1 3/8" | 12.0 | 10 |


867/1 Z TORX® W bits



Application: TORX® socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: W = Wedge TORX®, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | Icon | mm | mm | mm | Icon |
|-------------|-------|----|----|----|------|
| 05066450001 | TX 10 | 25 | 1" | | 10 |
| 05066455001 | TX 15 | 25 | 1" | | 10 |
| 05066460001 | TX 20 | 25 | 1" | | 10 |
| 05066465001 | TX 25 | 25 | 1" | | 10 |
| 05066470001 | TX 27 | 25 | 1" | | 10 |
| 05066475001 | TX 30 | 25 | 1" | | 10 |
| 05066480001 | TX 40 | 25 | 1" | | 10 |

Wera ABC



TORX® Wedge

The conical TORX® profile provides a better fit in the screw. Combined with a great recess depth this produces a pinch effect.



Bits



Bits for TORX® Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

867/4 IMP DC Impaktor TORX® bits



Application: TORX® socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: The Impaktor technology ensures superior service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance

| Code | mm | mm | mm | mm |
|-------------|-------|----|----|----|
| 05057665001 | TX 25 | 50 | 2" | 5 |
| 05057666001 | TX 30 | 50 | 2" | 5 |
| 05057667001 | TX 40 | 50 | 2" | 5 |

867/4 TORX® HF bits with holding function




Application: TORX® socket screws made according to Acument Intellectual Properties specifications
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Holding function for TORX® screws

| Code | mm | mm | mm | mm |
|-------------|-------|----|--------|-----|
| 05060080001 | TX 8 | 50 | 2" | 3.0 |
| 05060360001 | TX 10 | 89 | 3 1/2" | 4.0 |
| 05060081001 | TX 10 | 50 | 2" | 4.0 |
| 05060361001 | TX 15 | 89 | 3 1/2" | 4.0 |
| 05060082001 | TX 15 | 50 | 2" | 4.0 |
| 05060362001 | TX 20 | 89 | 3 1/2" | 4.5 |
| 05060083001 | TX 20 | 50 | 2" | 4.5 |
| 05060084001 | TX 25 | 50 | 2" | 6.0 |
| 05060363001 | TX 25 | 89 | 3 1/2" | 6.0 |
| 05060085001 | TX 27 | 50 | 2" | 6.0 |
| 05060364001 | TX 27 | 89 | 3 1/2" | 6.0 |
| 05060086001 | TX 30 | 50 | 2" | 6.0 |
| 05060365001 | TX 30 | 89 | 3 1/2" | 6.0 |
| 05060087001 | TX 40 | 50 | 2" | - |
| 05060366001 | TX 40 | 89 | 3 1/2" | - |

Impaktor bits and holder For superior service life

Maximum utilisation of the material properties, a very special geometry – designed particularly to meet the extreme demands – as well a specific manufacturing process mean that Wera Impaktor tools have superior service life. Another product advantage is the coating of the Impaktor bits with minute diamond particles. These diamond particles reduce the cam-out effects – particularly high in power tool applications – which can lead to a slipping out of the screw head. The diamond particles literally bite themselves into the screw recess. This means that less contact pressure is required, something that greatly delays fatigue setting-in in power tool screwdriving jobs.



867/4 H TORX® bits



Application: TORX® socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Extra-hard, ideal for less demanding screwdriving jobs e.g. in wood

| Code | mm | mm | mm | mm |
|-------------|-------|----|--------|-----|
| 05135170001 | TX 5 | 50 | 2" | 3.0 |
| 05135171001 | TX 5 | 70 | 2 3/4" | 3.0 |
| 05135172001 | TX 6 | 50 | 2" | 3.0 |
| 05135180001 | TX 6 | 70 | 2 3/4" | 3.0 |
| 05135173001 | TX 7 | 50 | 2" | 3.0 |
| 05135175001 | TX 7 | 70 | 2 3/4" | 3.0 |
| 05135174001 | TX 8 | 50 | 2" | 3.0 |
| 05135182001 | TX 8 | 70 | 2 3/4" | 3.0 |
| 05135177001 | TX 9 | 50 | 2" | 3.0 |
| 05135178001 | TX 9 | 70 | 2 3/4" | 3.0 |
| 05135176001 | TX 10 | 50 | 2" | 4.0 |
| 05135184001 | TX 10 | 70 | 2 3/4" | 4.0 |
| 05135185001 | TX 15 | 50 | 2" | 4.0 |
| 05135186001 | TX 15 | 70 | 2 3/4" | 4.0 |




867/4 KK Ball end TORX® bits



Application: TORX® socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Ball end, tough

| Code | mm | mm | mm | |
|-------------|-------|----|--------|---|
| 05059700001 | TX 10 | 89 | 3 1/2" | 5 |
| 05059701001 | TX 15 | 89 | 3 1/2" | 5 |
| 05059702001 | TX 20 | 89 | 3 1/2" | 5 |
| 05059703001 | TX 25 | 89 | 3 1/2" | 5 |
| 05059704001 | TX 30 | 89 | 3 1/2" | 5 |
| 05059705001 | TX 40 | 89 | 3 1/2" | 5 |

TORX® ball end tip



The spherical drive profile means that it is possible to swivel the axis of the tool to that of the screw, and therefore enable angled, "around-the-corner" screwdriving jobs. This ball tip geometry – often found on L-keys – is now available on a number of Wera bits.

867/4 Z TORX® bits



Application: TORX® socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | |
|-------------|-------|-----|--------|----|
| 05135200001 | TX 1 | 50 | 2" | 10 |
| 05135201001 | TX 2 | 50 | 2" | 10 |
| 05135202001 | TX 3 | 50 | 2" | 10 |
| 05135204001 | TX 4 | 50 | 2" | 10 |
| 05135205001 | TX 5 | 50 | 2" | 10 |
| 05308428002 | TX 6 | 50 | 2" | 10 |
| 05134740001 | TX 6 | 70 | 2 3/4" | 10 |
| 05332600001 | TX 6 | 89 | 3 1/2" | 10 |
| 05328448001 | TX 6 | 152 | 6" | 10 |
| 05160830001 | TX 7 | 50 | 2" | 10 |
| 05060131001 | TX 8 | 50 | 2" | 10 |
| 05060098001 | TX 8 | 70 | 2 3/4" | 10 |
| 05060185001 | TX 8 | 89 | 3 1/2" | 10 |
| 05060195001 | TX 8 | 152 | 6" | 10 |
| 05060193001 | TX 9 | 89 | 3 1/2" | 10 |
| 05060194001 | TX 9 | 152 | 6" | 10 |
| 05060132001 | TX 10 | 50 | 2" | 10 |
| 05060100001 | TX 10 | 70 | 2 3/4" | 10 |
| 05060186001 | TX 10 | 89 | 3 1/2" | 10 |
| 05060196001 | TX 10 | 152 | 6" | 10 |
| 05060133001 | TX 15 | 50 | 2" | 10 |
| 05060105001 | TX 15 | 70 | 2 3/4" | 10 |
| 05060187001 | TX 15 | 89 | 3 1/2" | 10 |
| 05060197001 | TX 15 | 152 | 6" | 10 |
| 05060134001 | TX 20 | 50 | 2" | 10 |
| 05060110001 | TX 20 | 70 | 2 3/4" | 10 |
| 05060188001 | TX 20 | 89 | 3 1/2" | 10 |
| 05060198001 | TX 20 | 152 | 6" | 10 |
| 05060135001 | TX 25 | 50 | 2" | 10 |
| 05060115001 | TX 25 | 70 | 2 3/4" | 10 |
| 05060189001 | TX 25 | 89 | 3 1/2" | 10 |
| 05060199001 | TX 25 | 152 | 6" | 10 |
| 05060136001 | TX 27 | 50 | 2" | 10 |
| 05060120001 | TX 27 | 70 | 2 3/4" | 10 |
| 05060190001 | TX 27 | 89 | 3 1/2" | 10 |
| 05060200001 | TX 27 | 152 | 6" | 10 |
| 05060137001 | TX 30 | 50 | 2" | 10 |
| 05060125001 | TX 30 | 70 | 2 3/4" | 10 |
| 05060191001 | TX 30 | 89 | 3 1/2" | 10 |
| 05060201001 | TX 30 | 152 | 6" | 10 |
| 05060138001 | TX 40 | 50 | 2" | 10 |
| 05060130001 | TX 40 | 70 | 2 3/4" | 10 |
| 05060192001 | TX 40 | 89 | 3 1/2" | 10 |
| 05060202001 | TX 40 | 152 | 6" | 10 |



Bits



Bits for TORX® Screws



3 mm

3 mm hexagon drive, suitable for B 3 bit holders (series 00)







867/00 Z TORX® bits




Application: TORX® socket screws

Drive: 3 mm hexagon, suitable for DIN 3126-B 3, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

|  Code |  |  mm |  2" |  mm |  |
|--|---|--|--|--|---|
| 05209890001 | TX 3 | 50 | 2" | 2.3 | 10 |
| 05209891001 | TX 4 | 50 | 2" | 2.3 | 10 |
| 05160952001 | TX 5 | 50 | 2" | 2.0 | 10 |
| 05160869001 | TX 6 | 50 | 2" | 2.0 | 10 |
| 05134770001 | TX 6 | 50 | 2" | - | 10 |
| 05134771001 | TX 7 | 50 | 2" | - | 10 |
| 05134772001 | TX 8 | 50 | 2" | 2.8 | 10 |
| 05134773001 | TX 10 | 50 | 2" | - | 10 |

Wera ABC



Z Bits

Tough bits for hard materials e.g. sheet steel or metal. In this case the screw initially turns smoothly inside the defined thread. As soon as the head of the screw touches the material surface, high torque

peaks are generated that have an affect on the screw and tool. This can mean that the bit breaks if it is too hard.

Tough Wera bits prevent any premature breakage of the drive tip. Recognisable in the catalog through the article letter Z.



5/16" hexagon drive, suitable for D 8 bit holders or direct drive (series 2)









867/2 Z TORX® bits



Application: TORX® socket screws

Drive: 5/16" hexagon, suitable for DIN 3126-D 8, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| Code | | mm | mm | mm | |
| 05066901001 | TX 20 | 35 | 1 3/8" | 4.5 | 10 |
| 05066930001 | TX 20 | 50 | 2" | 4.5 | 10 |
| 05066945001 | TX 20 | 70 | 2 3/4" | 4.5 | 10 |
| 05066935001 | TX 20 | 100 | 4" | 4.5 | 10 |
| 05066900001 | TX 25 | 35 | 1 3/8" | 5.8 | 10 |
| 05066931001 | TX 25 | 50 | 2" | 5.8 | 10 |
| 05066946001 | TX 25 | 70 | 2 3/4" | 5.8 | 10 |
| 05066936001 | TX 25 | 100 | 4" | 5.8 | 10 |
| 05066902001 | TX 27 | 35 | 1 3/8" | 5.8 | 10 |
| 05066932001 | TX 27 | 50 | 2" | 5.8 | 10 |
| 05066937001 | TX 27 | 100 | 4" | 5.8 | 10 |
| 05066905001 | TX 30 | 35 | 1 3/8" | 6.0 | 10 |
| 05066933001 | TX 30 | 50 | 2" | 6.0 | 10 |
| 05066947001 | TX 30 | 70 | 2 3/4" | 6.0 | 10 |
| 05066938001 | TX 30 | 100 | 4" | 6.0 | 10 |
| 05066910001 | TX 40 | 35 | 1 3/8" | 7.0 | 10 |
| 05066934001 | TX 40 | 50 | 2" | 7.0 | 10 |
| 05066948001 | TX 40 | 70 | 2 3/4" | 7.0 | 10 |
| 05066939001 | TX 40 | 100 | 4" | 7.0 | 10 |
| 05066915001 | TX 45 | 35 | 1 3/8" | - | 10 |
| 05066940001 | TX 45 | 50 | 2" | - | 10 |
| 05066949001 | TX 45 | 70 | 2 3/4" | - | 10 |
| 05066942001 | TX 45 | 100 | 4" | - | 10 |
| 05066920001 | TX 50 | 35 | 1 3/8" | - | 10 |
| 05066941001 | TX 50 | 50 | 2" | - | 10 |
| 05066950001 | TX 50 | 70 | 2 3/4" | - | 10 |
| 05066943001 | TX 50 | 100 | 4" | - | 10 |
| 05066925001 | TX 55 | 35 | 1 3/8" | 12.0 | 10 |
| 05136220001 | TX 60 | 35 | 1 3/8" | 14.0 | 10 |



Bits



Bits for TORX® Screws



Thread drive $10/32$ " NF2A direct drive (series 16)

867/16 TORX® bits



Application: TORX® screws
Drive: Thread drive $10/32$ " NF2A
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | |
|-------------|-------|----|------------------|-----|
| 05064185001 | TX 10 | 45 | $1\frac{3}{4}$ " | 6.0 |
| 05064190001 | TX 15 | 45 | $1\frac{3}{4}$ " | 6.0 |
| 05064200001 | TX 20 | 45 | $1\frac{3}{4}$ " | 6.0 |
| 05064202001 | TX 25 | 45 | $1\frac{3}{4}$ " | 6.0 |

867/16 BH TORX® bits



NEW

Application: TORX® screws
Drive: Thread drive $10/32$ " NF2A with bolster for inserting the thread drive into the chuck of a drill
Design: Hard

| Code | mm | mm | mm | |
|-------------|-------|----|------------------|-----|
| 05380254001 | TX 8 | 38 | $1\frac{1}{2}$ " | 3.0 |
| 05380255001 | TX 10 | 38 | $1\frac{1}{2}$ " | 4.0 |
| 05380256001 | TX 15 | 38 | $1\frac{1}{2}$ " | 4.0 |
| 05380257001 | TX 20 | 38 | $1\frac{1}{2}$ " | 4.5 |
| 05380258001 | TX 25 | 38 | $1\frac{1}{2}$ " | 5.0 |



4 mm Halfmoon direct drive (series 9)

867/9 C TORX® bits, halfmoon



Application: TORX® socket screws
Drive: Halfmoon, 4 mm
Design: Precision hardened for sensitive applications

| Code | mm | mm | mm | mm | mm | |
|---------------------------|-------|----|--------------------|-----|----|-------------------|
| 05135220001 ¹⁾ | TX 1 | 44 | $1\frac{47}{64}$ " | 1.5 | 20 | $\frac{25}{32}$ " |
| 05135221001 ¹⁾ | TX 2 | 44 | $1\frac{47}{64}$ " | 1.5 | 20 | $\frac{25}{32}$ " |
| 05135222001 ¹⁾ | TX 3 | 44 | $1\frac{47}{64}$ " | 1.7 | 20 | $\frac{25}{32}$ " |
| 05345352001 | TX 4 | 44 | $1\frac{47}{64}$ " | 1.8 | 20 | $\frac{25}{32}$ " |
| 05345018001 | TX 4 | 64 | $2\frac{33}{64}$ " | 2.0 | 20 | $\frac{25}{32}$ " |
| 05345351001 | TX 5 | 44 | $1\frac{47}{64}$ " | 3.0 | 30 | $1\frac{3}{16}$ " |
| 05345032001 | TX 5 | 64 | $2\frac{33}{64}$ " | 2.0 | 20 | $\frac{25}{32}$ " |
| 05314753001 | TX 5 | 70 | $2\frac{3}{4}$ " | 2.0 | 20 | $\frac{25}{32}$ " |
| 05345350001 | TX 6 | 44 | $1\frac{47}{64}$ " | 3.0 | 30 | $1\frac{3}{16}$ " |
| 05345056001 | TX 6 | 64 | $2\frac{33}{64}$ " | 2.0 | 20 | $\frac{25}{32}$ " |
| 05332610001 | TX 6 | 70 | $2\frac{3}{4}$ " | 3.0 | 20 | $\frac{25}{32}$ " |
| 05345035001 | TX 7 | 64 | $2\frac{33}{64}$ " | 2.3 | 33 | $\frac{19}{64}$ " |
| 05345026001 | TX 8 | 44 | $1\frac{47}{64}$ " | 3.0 | 20 | $\frac{25}{32}$ " |
| 05345028001 | TX 8 | 64 | $2\frac{33}{64}$ " | 3.0 | 20 | $\frac{25}{32}$ " |
| 05332609001 | TX 8 | 70 | $2\frac{3}{4}$ " | 3.0 | 20 | $\frac{25}{32}$ " |
| 05332607001 | TX 10 | 70 | $2\frac{3}{4}$ " | 3.0 | 20 | $\frac{25}{32}$ " |

¹⁾ Delivery on request.



4 mm HIOS direct drive (series 21)



4 mm

867/21 TORX® bits



Application: TORX® socket screws

Drive: HIOS 4 mm

Design: Precision hardened for sensitive applications

| Code | | mm | | | mm | |
|---------------------------|-------|----|---------|----|--------|----|
| 05135400001 ¹⁾ | TX 1 | 40 | 1 9/16" | 20 | 25/32" | 10 |
| 05135401001 ¹⁾ | TX 2 | 40 | 1 9/16" | 20 | 25/32" | 10 |
| 05135402001 ¹⁾ | TX 3 | 40 | 1 9/16" | 20 | 25/32" | 10 |
| 05135403001 | TX 4 | 40 | 1 9/16" | 20 | 25/32" | 10 |
| 05135404001 | TX 5 | 40 | 1 9/16" | 20 | 25/32" | 10 |
| 05135405001 | TX 6 | 40 | 1 9/16" | 20 | 25/32" | 10 |
| 05135406001 | TX 7 | 40 | 1 9/16" | 20 | 25/32" | 10 |
| 05135407001 | TX 8 | 40 | 1 9/16" | 20 | 25/32" | 10 |
| 05135408001 | TX 9 | 40 | 1 9/16" | 20 | 25/32" | 10 |
| 05135409001 | TX 10 | 40 | 1 9/16" | 20 | 25/32" | 10 |

¹⁾ Delivery on request.

5 mm HIOS direct drive (series 22)



5 mm

867/22 TORX® bits



Application: TORX® screws

Drive: HIOS 5 mm

Design: Tough

| Code | | mm | | mm | |
|-------------|-------|----|--------|-----|----|
| 05135420001 | TX 5 | 60 | 2 3/8" | 2.0 | 10 |
| 05135421001 | TX 6 | 60 | 2 3/8" | 2.5 | 10 |
| 05135422001 | TX 7 | 60 | 2 3/8" | 2.5 | 10 |
| 05135423001 | TX 8 | 60 | 2 3/8" | 3.0 | 10 |
| 05135424001 | TX 9 | 60 | 2 3/8" | 3.0 | 10 |
| 05135425001 | TX 10 | 60 | 2 3/8" | 3.0 | 10 |



Bits



Bits for Tamper-proof TORX® Screws, with safety pin



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)


867/1 Z TORX® BO bits



Application: TORX® socket screws with safety pin (BO = with bore hole)
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: TORX® with bore hole, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | Series | Length (mm) | Length (in) | Icon |
|-------------|--------|-------------|-------------|------|
| 05066497001 | TX 7 | 25 | 1" | 10 |
| 05066498001 | TX 8 | 25 | 1" | 10 |
| 05066499001 | TX 9 | 25 | 1" | 10 |
| 05066500001 | TX 10 | 25 | 1" | 10 |
| 05066505001 | TX 15 | 25 | 1" | 10 |
| 05066510001 | TX 20 | 25 | 1" | 10 |
| 05066515001 | TX 25 | 25 | 1" | 10 |
| 05066520001 | TX 27 | 25 | 1" | 10 |
| 05066525001 | TX 30 | 25 | 1" | 10 |
| 05066530001 | TX 40 | 25 | 1" | 10 |

Wera ABC



Z Bits

Tough bits for hard materials e.g. sheet steel or metal. In this case the screw initially turns smoothly inside the defined thread. As soon as the head of the screw touches the material surface, high torque peaks

are generated that have an affect on the screw and tool. This can mean that the bit breaks if it is too hard.

Tough Wera bits prevent any premature breakage of the drive tip. Recognisable in the catalog through the article letter Z.



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

867/4 Z TORX® BO bits with bore hole




Application: TORX® socket screws with safety pin (BO = with bore hole)
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: TORX® with bore hole, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | Series | Length (mm) | Length (in) | Bore Hole (mm) | Icon |
|-------------|--------|-------------|-------------|----------------|------|
| 05060139001 | TX 8 | 70 | 2 3/4" | 3.0 | 10 |
| 05060048001 | TX 8 | 89 | 3 1/2" | 3.0 | 10 |
| 05060049001 | TX 9 | 89 | 3 1/2" | 3.0 | 10 |
| 05060140001 | TX 10 | 70 | 2 3/4" | 4.0 | 10 |
| 05060050001 | TX 10 | 89 | 3 1/2" | 4.0 | 5 |
| 05060141001 | TX 15 | 70 | 2 3/4" | 4.0 | 10 |
| 05060051001 | TX 15 | 89 | 3 1/2" | 4.0 | 5 |
| 05060142001 | TX 20 | 70 | 2 3/4" | 4.5 | 10 |
| 05060052001 | TX 20 | 89 | 3 1/2" | 4.5 | 5 |
| 05060143001 | TX 25 | 70 | 2 3/4" | 6.0 | 10 |
| 05060053001 | TX 25 | 89 | 3 1/2" | 6.0 | 10 |
| 05060144001 | TX 27 | 70 | 2 3/4" | 6.0 | 10 |
| 05060057001 | TX 27 | 89 | 3 1/2" | 6.0 | 5 |
| 05060145001 | TX 30 | 70 | 2 3/4" | 6.0 | 10 |
| 05060054001 | TX 30 | 89 | 3 1/2" | 6.0 | 5 |
| 05060146001 | TX 40 | 70 | 2 3/4" | - | 10 |
| 05060056001 | TX 40 | 89 | 3 1/2" | - | 5 |



TORX® with borehole



TORX® tools with a borehole prevent the unauthorised unfastening of safety screws. The screws contain a pin that protrudes into the drive profile so that "normal" TORX® tools cannot be used. This pin fits

into the borehole of TORX® BO tools allowing safety screws to be unfastened.

Bits for TORX PLUS® Screws



1/4" hexagon drive, suitable for D 6.3 bit holders
(series 1)



867/1 H IP TORX PLUS® bits



Application: TORX PLUS® socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Extra-hard, ideal for less demanding screwdriving jobs e.g. in wood

| Code | IP | mm | 1" | mm | |
|-------------|------|----|----|-----|----|
| 05135120001 | IP 1 | 25 | 1" | 1.5 | 10 |
| 05135121001 | IP 2 | 25 | 1" | 1.5 | 10 |
| 05160956002 | IP 3 | 25 | 1" | 2.0 | 10 |
| 05134695001 | IP 4 | 25 | 1" | 2.0 | 10 |

867/1 Z IP TORX PLUS® bits



Application: TORX PLUS® socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | IP | mm | 1" | |
|-------------|-------|----|----|----|
| 05066272001 | 5 IP | 25 | 1" | 10 |
| 05066274001 | 6 IP | 25 | 1" | 10 |
| 05066276001 | 7 IP | 25 | 1" | 10 |
| 05066278001 | 8 IP | 25 | 1" | 10 |
| 05066279001 | 9 IP | 25 | 1" | 10 |
| 05066280001 | 10 IP | 25 | 1" | 10 |
| 05066282001 | 15 IP | 25 | 1" | 10 |
| 05066284001 | 20 IP | 25 | 1" | 10 |
| 05066286001 | 25 IP | 25 | 1" | 10 |
| 05066287001 | 27 IP | 25 | 1" | 10 |
| 05066288001 | 30 IP | 25 | 1" | 10 |
| 05066290001 | 40 IP | 25 | 1" | 10 |

Wera ABC



TORX PLUS®

Compared with the "normal", round TORX® profile the elliptical profile of TORX PLUS® tools makes it possible to increase the size of the 6 flanks that transfer torque between the tool and the screw. The force applied by the user is distributed across a larger surface area allowing more torque to be transferred and extending the service life of both the screw and the tool.



Bits



Bits for TORX PLUS® Screws



1/4" hexagon drive, suitable for F 6.3 bit holders
(series 4)


867/4 Z IP TORX PLUS® bits



Application: TORX PLUS® socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | IP | mm | mm | mm | mm |
|-------------|-------|-----|--------|-----|----|
| 05134664001 | 1 IP | 50 | 2" | 2.0 | 10 |
| 05134665001 | 2 IP | 50 | 2" | 2.0 | 10 |
| 05134668001 | 3 IP | 50 | 2" | 2.0 | 10 |
| 05134691001 | 4 IP | 50 | 2" | 3.0 | 10 |
| 05134678001 | 5 IP | 50 | 2" | 3.0 | 10 |
| 05134680001 | 6 IP | 50 | 2" | 3.0 | 10 |
| 05134667001 | 6 IP | 89 | 3 1/2" | 3.0 | 10 |
| 05134690001 | 6 IP | 152 | 6" | 3.0 | 10 |
| 05134681001 | 7 IP | 50 | 2" | 3.0 | 10 |
| 05134679001 | 8 IP | 50 | 2" | 3.0 | 10 |
| 05134670001 | 8 IP | 89 | 3 1/2" | 3.0 | 10 |
| 05134682001 | 8 IP | 152 | 6" | 3.0 | 10 |
| 05160917001 | 9 IP | 50 | 2" | 3.0 | 10 |
| 05134669001 | 9 IP | 89 | 3 1/2" | 3.0 | 10 |
| 05134683001 | 10 IP | 50 | 2" | 4.0 | 10 |
| 05134684001 | 10 IP | 70 | 2 3/4" | 4.0 | 10 |
| 05134671001 | 10 IP | 89 | 3 1/2" | 4.0 | 10 |
| 05134685001 | 15 IP | 50 | 2" | 4.0 | 10 |
| 05134686001 | 15 IP | 70 | 2 3/4" | 4.0 | 10 |
| 05134672001 | 15 IP | 89 | 3 1/2" | 4.0 | 10 |
| 05134687001 | 20 IP | 50 | 2" | 4.5 | 10 |
| 05134688001 | 20 IP | 70 | 2 3/4" | 4.5 | 10 |
| 05134673001 | 20 IP | 89 | 3 1/2" | 4.5 | 10 |
| 05134674001 | 25 IP | 89 | 3 1/2" | 6.0 | 10 |
| 05134675001 | 27 IP | 89 | 3 1/2" | 6.0 | 10 |
| 05320430001 | 30 IP | 50 | 2" | 6.0 | 10 |
| 05134676001 | 30 IP | 89 | 3 1/2" | 6.0 | 10 |
| 05134677001 | 40 IP | 89 | 3 1/2" | - | 10 |

Wera ABC



Z Bits

Tough bits for hard materials e.g. sheet steel or metal. In this case the screw initially turns smoothly inside the defined thread. As soon as the head of the screw touches the material surface, high torque peaks

are generated that have an affect on the screw and tool. This can mean that the bit breaks if it is too hard.

Tough Wera bits prevent any premature breakage of the drive tip. Recognisable in the catalog through the article letter Z.



3 mm hexagon drive, suitable for B 3 bit holders (series 00)



3 mm

867/00 TORX PLUS® bits



Application: TORX PLUS® socket screws

Drive: 3 mm hexagon, suitable for DIN 3126-B 3, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm |
|-------------|------|----|----|-----|
| 05135110001 | 3 IP | 50 | 2" | 2.0 |
| 05135111001 | 4 IP | 50 | 2" | 2.0 |
| 05338780001 | 5 IP | 50 | 2" | 2.0 |
| 05338781001 | 6 IP | 50 | 2" | 2.0 |
| 05314810001 | 6 IP | 50 | 2" | 2.2 |

4 mm Halfmoon direct drive (series 9)



4 mm

867/9 C IP TORX PLUS® bits, halfmoon



Application: TORX PLUS® screws

Drive: Halfmoon, 4 mm

Design: Precision hardened for sensitive applications

| Code | mm | mm | mm | mm | mm |
|---------------------------|-------|----|-----------------------------------|------|------------------------------------|
| 05135230001 ¹⁾ | 1 IP | 44 | 1 ⁴⁷ / ₆₄ " | 1.5 | 20 ²⁵ / ₃₂ " |
| 05135231001 ¹⁾ | 2 IP | 44 | 1 ⁴⁷ / ₆₄ " | 1.5 | 20 ²⁵ / ₃₂ " |
| 05135232001 ¹⁾ | 3 IP | 44 | 1 ⁴⁷ / ₆₄ " | 1.7 | 20 ²⁵ / ₃₂ " |
| 05326310001 | 4 IP | 44 | 1 ⁴⁷ / ₆₄ " | 2.0 | 20 ²⁵ / ₃₂ " |
| 05345019001 | 4 IP | 64 | 2 ³³ / ₆₄ " | 2.0 | 20 ²⁵ / ₃₂ " |
| 05135233001 | 5 IP | 44 | 1 ⁴⁷ / ₆₄ " | 2.0 | 20 ²⁵ / ₃₂ " |
| 05332612001 | 5 IP | 70 | 2 ³ / ₄ " | 3.0 | 20 ²⁵ / ₃₂ " |
| 05344900001 | 6 IP | 44 | 1 ⁴⁷ / ₆₄ " | 2.25 | 20 ²⁵ / ₃₂ " |
| 05135234001 | 8 IP | 44 | 1 ⁴⁷ / ₆₄ " | 3.0 | 20 ²⁵ / ₃₂ " |
| 05332606001 | 8 IP | 70 | 2 ³ / ₄ " | 3.0 | 20 ²⁵ / ₃₂ " |
| 05135235001 | 10 IP | 44 | 1 ⁴⁷ / ₆₄ " | 3.0 | 20 ²⁵ / ₃₂ " |

¹⁾ Delivery on request.



Bits



Bits for TORX PLUS® Screws



4 mm HIOS direct drive (series 21)

4 mm

867/21 IP TORX PLUS® bits



Application: TORX PLUS® screws

Drive: HIOS 4 mm

Design: Precision hardened for sensitive applications

| Code | | mm | mm | mm | mm | mm | |
|---------------------------|-------|----|---------|-----|----|--------|----|
| 05135430001 ¹⁾ | 1 IP | 40 | 1 9/16" | 1.5 | 20 | 25/32" | 10 |
| 05135431001 ¹⁾ | 2 IP | 40 | 1 9/16" | 1.5 | 20 | 25/32" | 10 |
| 05135432001 ¹⁾ | 3 IP | 40 | 1 9/16" | 1.7 | 20 | 25/32" | 10 |
| 05302402001 | 4 IP | 40 | 1 9/16" | 1.8 | 20 | 25/32" | 10 |
| 05302403001 | 5 IP | 40 | 1 9/16" | 2.0 | 20 | 25/32" | 10 |
| 05302400001 | 6 IP | 40 | 1 9/16" | 2.0 | 20 | 25/32" | 10 |
| 05135433001 | 7 IP | 40 | 1 9/16" | 2.5 | 20 | 25/32" | 10 |
| 05135434001 | 8 IP | 40 | 1 9/16" | 3.0 | 20 | 25/32" | 10 |
| 05135435001 | 9 IP | 40 | 1 9/16" | 3.0 | 20 | 25/32" | 10 |
| 05135436001 | 10 IP | 40 | 1 9/16" | 3.0 | 20 | 25/32" | 10 |

¹⁾ Delivery on request.



5 mm HIOS direct drive (series 22)

5 mm

867/22 IP TORX PLUS® bits



Application: TORX PLUS® screws

Drive: HIOS 5 mm

Design: Precision hardened for sensitive applications

| Code | | mm | mm | mm | mm | mm | |
|-------------|-------|----|--------|-----|----|--------|----|
| 05135440001 | 5 IP | 60 | 2 3/8" | 2.0 | 20 | 25/32" | 10 |
| 05344280001 | 6 IP | 60 | 2 3/8" | 2.5 | 20 | 25/32" | 10 |
| 05135441001 | 7 IP | 60 | 2 3/8" | 2.5 | 20 | 25/32" | 10 |
| 05344281001 | 8 IP | 80 | 3 1/8" | 3.0 | 20 | 25/32" | 10 |
| 05135442001 | 9 IP | 60 | 2 3/8" | 3.0 | 20 | 25/32" | 10 |
| 05135443001 | 10 IP | 60 | 2 3/8" | 3.0 | 20 | 25/32" | 10 |
| 05344282001 | 10 IP | 80 | 3 1/8" | 3.0 | 20 | 25/32" | 10 |

Bits for Tamper-proof TORX PLUS® IPR Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)



867/1 IPR TORX PLUS® bits with bore hole




Application: TORX PLUS® socket screws with safety pin
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | IPR | mm | mm | mm |
|-------------|--------|----|--------|----|
| 05134699001 | 8 IPR | 25 | 1" | 10 |
| 05134698001 | 9 IPR | 25 | 1" | 10 |
| 05134700001 | 10 IPR | 25 | 1" | 10 |
| 05134701001 | 15 IPR | 25 | 1" | 10 |
| 05134702001 | 20 IPR | 25 | 1" | 10 |
| 05134703001 | 25 IPR | 25 | 1" | 10 |
| 05134704001 | 27 IPR | 25 | 1" | 10 |
| 05134705001 | 30 IPR | 25 | 1" | 10 |
| 05134706001 | 40 IPR | 35 | 1 3/8" | 10 |
| 05134707001 | 45 IPR | 35 | 1 3/8" | 10 |

Attention: Safety profile - sold only to authorised customers. Such authorisation has to be proven in writing.

Wera ABC



TORX PLUS® IPR

A 5-flank TORX PLUS® profile with a borehole. This drive geometry has only five flanks instead of the usual six and a borehole to protect safety screws against unauthorised

unfastening. The screws cannot be turned with conventional, widely available tools.

1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)



867/4 IPR TORX PLUS® bits with bore hole



Application: TORX PLUS® socket screws with safety pin
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | IPR | mm | mm | mm |
|-------------|--------|----|--------|-----|
| 05160821001 | 10 IPR | 50 | 2" | 4.0 |
| 05134657001 | 10 IPR | 89 | 3 1/2" | 4.0 |
| 05134654001 | 15 IPR | 50 | 2" | 4.0 |
| 05134720001 | 15 IPR | 89 | 3 1/2" | 4.0 |
| 05204126001 | 20 IPR | 50 | 2" | 4.5 |
| 05259135001 | 20 IPR | 89 | 3 1/2" | 4.5 |
| 05134655001 | 25 IPR | 50 | 2" | 6.0 |
| 05134722001 | 25 IPR | 89 | 3 1/2" | 6.0 |
| 05134656001 | 27 IPR | 50 | 2" | 6.0 |
| 05134658001 | 27 IPR | 89 | 3 1/2" | 6.0 |
| 05134732001 | 30 IPR | 50 | 2" | 6.0 |
| 05134723001 | 30 IPR | 89 | 3 1/2" | 6.0 |

Attention: Safety profile - sold only to authorised customers. Such authorisation has to be proven in writing.



Bits



Bits for Slotted Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

800/1 BDC bits



Application: Slotted screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: BiTorsion for long service life, diamond-coated for secure screw fit

| Code | mm | mm | mm | | |
|-------------|-----|-----|----|----|----|
| 05056172001 | 0.8 | 5.5 | 25 | 1" | 10 |
| 05056174001 | 1.0 | 5.5 | 25 | 1" | 10 |
| 05056176001 | 1.2 | 6.5 | 25 | 1" | 10 |

800/1 BTH bits



Application: Slotted screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: BiTorsion for long service life, extra-hard, ideal for less demanding screwdriving jobs e.g. in wood

| Code | mm | mm | mm | | |
|-------------|-----|-----|----|----|----|
| 05056084001 | 0.8 | 5.5 | 25 | 1" | 10 |
| 05056086001 | 1.0 | 5.5 | 25 | 1" | 10 |
| 05056088001 | 1.2 | 6.5 | 25 | 1" | 10 |

800/1 BTZ bits



Application: Slotted screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: BiTorsion for long service life, extra-tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | | |
|-------------|-----|-----|----|----|----|
| 05056064001 | 0.8 | 5.5 | 25 | 1" | 10 |
| 05056066001 | 1.0 | 5.5 | 25 | 1" | 10 |
| 05056068001 | 1.2 | 6.5 | 25 | 1" | 10 |

800/1 TZ bits



Application: Slotted screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Torsion-style design to reduce premature wear, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | | | |
|-------------|-----|-----|----|----|-----|----|
| 05056203001 | 0.5 | 4.0 | 25 | 1" | 4.0 | 10 |
| 05056210001 | 0.6 | 4.5 | 25 | 1" | 4.5 | 10 |
| 05056240001 | 1.6 | 8.0 | 25 | 1" | 8.0 | 10 |

800/1 Z bits



Application: Slotted screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | | | |
|-------------|-----|-----|----|----------|-----|----|
| 05056200001 | 0.5 | 3.0 | 25 | 1" | 3.0 | 10 |
| 05056005001 | 0.5 | 3.0 | 39 | 1 17/32" | 3.0 | 10 |
| 05072050001 | 0.5 | 4.0 | 25 | 1" | 4.0 | 10 |
| 05056007001 | 0.5 | 4.0 | 39 | 1 17/32" | 4.0 | 10 |
| 05056010001 | 0.6 | 3.5 | 39 | 1 17/32" | 3.5 | 10 |
| 05072055001 | 0.6 | 4.5 | 25 | 1" | 4.5 | 10 |
| 05056015001 | 0.6 | 4.5 | 39 | 1 17/32" | 4.5 | 10 |
| 05072057001 | 0.8 | 5.5 | 25 | 1" | 5.5 | 10 |
| 05056020001 | 0.8 | 4.0 | 39 | 1 17/32" | 4.0 | 10 |
| 05056025001 | 0.8 | 5.5 | 39 | 1 17/32" | 5.5 | 10 |
| 05072059001 | 1.0 | 5.5 | 25 | 1" | 5.5 | 10 |
| 05056030001 | 1.0 | 5.5 | 39 | 1 17/32" | 5.5 | 10 |
| 05072061001 | 1.2 | 6.5 | 25 | 1" | 6.2 | 10 |
| 05072063001 | 1.2 | 8.0 | 25 | 1" | 8.0 | 10 |
| 05056037001 | 1.2 | 6.5 | 39 | 1 17/32" | 6.5 | 10 |
| 05056040001 | 1.2 | 8.0 | 39 | 1 17/32" | 8.0 | 10 |
| 05072065001 | 1.6 | 8.0 | 25 | 1" | 8.0 | 10 |
| 05056045001 | 1.6 | 8.0 | 39 | 1 17/32" | 8.0 | 10 |



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)




800/4 Z bits



Application: Slotted screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm | mm | |
|-------------|-----|-----|-----|--------|-----|----|
| 05059305001 | 0.5 | 3.0 | 50 | 2" | 3.0 | 10 |
| 05059466001 | 0.5 | 3.0 | 70 | 2 3/4" | 3.0 | 10 |
| 05059307001 | 0.5 | 4.0 | 50 | 2" | 4.0 | 10 |
| 05059310001 | 0.6 | 3.5 | 50 | 2" | 3.5 | 10 |
| 05059472001 | 0.6 | 3.5 | 70 | 2 3/4" | 3.5 | 10 |
| 05059450001 | 0.6 | 3.5 | 152 | 6" | 3.5 | 10 |
| 05059315001 | 0.6 | 4.5 | 50 | 2" | 4.5 | 10 |
| 05059489001 | 0.6 | 4.5 | 89 | 3 1/2" | 4.5 | 10 |
| 05059320001 | 0.8 | 4.0 | 50 | 2" | 4.0 | 10 |
| 05059478001 | 0.8 | 4.0 | 70 | 2 3/4" | 4.0 | 10 |
| 05059480001 | 0.8 | 4.0 | 89 | 3 1/2" | 4.0 | 10 |
| 05059451001 | 0.8 | 4.0 | 152 | 6" | 4.0 | 10 |
| 05059325001 | 0.8 | 5.5 | 50 | 2" | 5.5 | 10 |
| 05059330001 | 1.0 | 5.5 | 50 | 2" | 5.5 | 10 |
| 05059486001 | 1.0 | 5.5 | 70 | 2 3/4" | 5.5 | 10 |
| 05059488001 | 1.0 | 5.5 | 89 | 3 1/2" | 5.5 | 10 |
| 05059452001 | 1.0 | 5.5 | 152 | 6" | 5.5 | 10 |
| 05059335001 | 1.0 | 6.0 | 50 | 2" | 6.0 | 10 |
| 05059337001 | 1.2 | 6.5 | 50 | 2" | 6.2 | 10 |
| 05059492001 | 1.2 | 6.5 | 70 | 2 3/4" | 6.2 | 10 |
| 05059490001 | 1.2 | 6.5 | 89 | 3 1/2" | 6.2 | 10 |
| 05059453001 | 1.2 | 6.5 | 152 | 6" | 6.2 | 10 |
| 05059340001 | 1.2 | 8.0 | 50 | 2" | 8.0 | 10 |
| 05059496001 | 1.2 | 8.0 | 89 | 3 1/2" | 8.0 | 10 |
| 05059345001 | 1.6 | 8.0 | 50 | 2" | 8.0 | 10 |
| 05059500001 | 1.6 | 8.0 | 89 | 3 1/2" | 8.0 | 10 |

Wera ABC



Z Bits

Tough bits for hard materials e.g. sheet steel or metal. In this case the screw initially turns smoothly inside the defined thread. As soon as the head of the screw touches the material surface, high torque peaks

are generated that have an affect on the screw and tool. This can mean that the bit breaks if it is too hard.

Tough Wera bits prevent any premature breakage of the drive tip. Recognisable in the catalog through the article letter Z.



Bits



Bits for Slotted Screws



3 mm

3 mm hexagon drive, suitable for B 3 bit holders (series 00)








800/00 Z bits



Application: Slotted screws

Drive: 3 mm hexagon, suitable for DIN 3126-B 3, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

|  |  |  |  |  |  |  |
|---|---|---|---|---|---|---|
| Code | mm | mm | mm | mm | mm | mm |
| 05055150001 | 0.30 | 1.8 | 50 | 2" | 1.8 | 10 |
| 05055155001 | 0.40 | 2.0 | 50 | 2" | 2.0 | 10 |
| 05055160001 | 0.40 | 2.5 | 50 | 2" | 2.5 | 10 |
| 05055165001 | 0.50 | 3.0 | 50 | 2" | 3.0 | 10 |
| 05055170001 | 0.50 | 4.0 | 50 | 2" | 4.0 | 10 |
| 05055175001 | 0.60 | 3.5 | 50 | 2" | 3.5 | 10 |
| 05055180001 | 0.60 | 4.5 | 50 | 2" | 4.5 | 10 |
| 05055185001 | 0.80 | 4.0 | 50 | 2" | 4.0 | 10 |
| 05055190001 | 0.80 | 5.5 | 50 | 2" | 5.5 | 10 |



5/16"

5/16" hexagon drive, suitable for D 8 bit holders or direct drive (series 2)

800/2 Z bits



Application: Slotted screws

Drive: 5/16" hexagon, suitable for DIN 3126-D 8, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

|  |  |  |  |  |  |  |
|---|---|---|---|---|---|---|
| Code | mm | mm | mm | mm | mm | mm |
| 05057210001 | 0.8 | 5.5 | 41 | 1 19/32" | 5.5 | 10 |
| 05057213001 | 1.0 | 5.5 | 41 | 1 19/32" | 5.5 | 10 |
| 05057223001 | 1.2 | 6.5 | 41 | 1 19/32" | 6.5 | 10 |
| 05057225001 | 1.2 | 8.0 | 41 | 1 19/32" | 7.8 | 10 |
| 05057230001 | 1.6 | 8.0 | 41 | 1 19/32" | 7.8 | 10 |
| 05057235001 | 1.6 | 10.0 | 41 | 1 19/32" | 7.8 | 10 |
| 05057240001 | 2.0 | 12.0 | 41 | 1 19/32" | 12.0 | 10 |
| 05057250001 | 2.5 | 14.0 | 41 | 1 19/32" | 14.0 | 10 |
| 05057255001 | 2.5 | 16.0 | 41 | 1 19/32" | 16.0 | 10 |

Guide Sleeves




807/4 Z bits



Application: Slotted screws with integrated guide sleeve
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm | mm | |
|-------------|-----|-----|----|--------|----|---|
| 05059503001 | 0.8 | 4.0 | 90 | 3 1/2" | 10 | 5 |
| 05059507001 | 1.0 | 5.5 | 90 | 3 1/2" | 11 | 5 |
| 05059515001 | 1.2 | 8.0 | 90 | 3 1/2" | 13 | 5 |
| 05059517001 | 1.6 | 8.0 | 90 | 3 1/2" | 13 | 5 |

Wera ABC



Z Bits

Tough bits for hard materials e.g. sheet steel or metal. In this case the screw initially turns smoothly inside the defined thread. As soon as the head of the screw touches the material surface, high torque peaks

are generated that have an affect on the screw and tool. This can mean that the bit breaks if it is too hard.

Tough Wera bits prevent any premature breakage of the drive tip. Recognisable in the catalog through the article letter Z.



Bits



Bits for Hexagon Socket Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

840/1 IMP DC Impaktor bits



Application: Hexagon socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: The Impaktor technology ensures superior service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance

| Code | mm | mm | mm | mm |
|-------------|-----|----|----|----|
| 05057604001 | 4.0 | 25 | 1" | 10 |
| 05057605001 | 5.0 | 25 | 1" | 10 |
| 05057606001 | 6.0 | 25 | 1" | 10 |

840/1 Z bits




Application: Hexagon socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Hex-Plus, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm |
|-------------|-------|----|----|----|
| 05056303001 | 1.5 | 25 | 1" | 10 |
| 05056305001 | 2.0 | 25 | 1" | 10 |
| 05056310001 | 2.5 | 25 | 1" | 10 |
| 05056315001 | 3.0 | 25 | 1" | 10 |
| 05056320001 | 4.0 | 25 | 1" | 10 |
| 05056325001 | 5.0 | 25 | 1" | 10 |
| 05056330001 | 6.0 | 25 | 1" | 10 |
| 05056332001 | 7.0 | 25 | 1" | 10 |
| 05056335001 | 8.0 | 25 | 1" | 10 |
| 05056340001 | 10.0 | 25 | 1" | 10 |
| 05135060001 | 0.05" | 25 | 1" | 10 |
| 05135070001 | 1/16" | 25 | 1" | 10 |
| 05135071001 | 5/64" | 25 | 1" | 10 |
| 05135072001 | 3/32" | 25 | 1" | 10 |
| 05135078001 | 7/64" | 25 | 1" | 10 |
| 05135073001 | 1/8" | 25 | 1" | 10 |
| 05135069001 | 9/64" | 25 | 1" | 10 |
| 05135074001 | 5/32" | 25 | 1" | 10 |
| 05135075001 | 3/16" | 25 | 1" | 10 |
| 05135079001 | 7/32" | 25 | 1" | 10 |
| 05135076001 | 1/4" | 25 | 1" | 10 |
| 05135077001 | 5/16" | 25 | 1" | 10 |
| 05135068001 | 3/8" | 25 | 1" | 10 |

Impaktor bits and holder For superior service life


Maximum utilisation of the material properties, a very special geometry – designed particularly to meet the extreme demands – as well a specific manufacturing process mean that Wera Impaktor tools have superior service life.

Another product advantage is the coating of the Impaktor bits with minute diamond particles. These diamond particles reduce the cam-out effects – particularly high in power tool applications – which can lead to a slipping out of the screw head. The diamond particles literally bite themselves into the screw recess. This means that less contact pressure is required, something that greatly delays fatigue setting-in in power tool screwdriving jobs.





842/1 Z bits



Application: Hexagon socket screws


Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: Ball end, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm | |
|-------------|-----|-------|----|----|----|
| 05056350001 | 2.5 | 25 | 1" | | 10 |
| 05056352001 | 3.0 | 25 | 1" | | 10 |
| 05056354001 | 4.0 | 25 | 1" | | 10 |
| 05056356001 | 5.0 | 25 | 1" | | 10 |
| 05056358001 | 6.0 | 25 | 1" | | 10 |
| 05380103001 | | 3/32" | 25 | 1" | 10 |
| 05380104001 | | 7/64" | 25 | 1" | 10 |
| 05380105001 | | 1/8" | 25 | 1" | 10 |
| 05380106001 | | 9/64" | 25 | 1" | 10 |
| 05380107001 | | 5/32" | 25 | 1" | 10 |
| 05380108001 | | 3/16" | 25 | 1" | 10 |
| 05380109001 | | 7/32" | 25 | 1" | 10 |
| 05380110001 | | 1/4" | 25 | 1" | 10 |




How to avoid rounded screw heads



Hexagon screws can endure a problem because the contact surfaces delivering the power from the conventional tool, is transferred to the screw via very small surface areas. The consequence: the screw can become damaged (rounding out). Hex-Plus tools have a greater contact surface that prevents this from happening! Good to know: Hex-Plus tools fit into every standard hexagon socket screw!

Wera ABC



Z Bits

Tough bits for hard materials e.g. sheet steel or metal. In this case the screw initially turns smoothly inside the defined thread. As soon as the head of the screw touches the material surface, high torque peaks are generated that have an affect on the screw and tool. This can mean that the bit breaks if it is too hard. Tough Wera bits prevent any premature breakage of the drive tip. Recognisable in the catalog through the article letter Z.





Bits for Hexagon Socket Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

840/4 IDC Impaktor bits



IMP-KTOR
Diamond

Hex-Plus

NEW




Application: Hexagon socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: The Impaktor technology ensures superior service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance

| Code | mm | mm | mm | |
|-------------|-----|----|----|---|
| 05057644001 | 4.0 | 50 | 2" | 5 |
| 05057645001 | 5.0 | 50 | 2" | 5 |
| 05057646001 | 6.0 | 50 | 2" | 5 |

Impaktor bits and holder For superior service life

Maximum utilisation of the material properties, a very special geometry – designed particularly to meet the extreme demands – as well as a specific manufacturing process mean that Wera Impaktor tools have superior service life.

Another product advantage is the coating of the Impaktor bits with minute diamond particles. These diamond particles reduce the cam-out effects – particularly high in power tool applications – which can lead to a slipping out of the screw head. The diamond particles literally bite themselves into the screw recess. This means that less contact pressure is required, something that greatly delays fatigue setting-in in power tool screwdriving jobs.



840/4 Z bits, metric

Hex-Plus


NEW



Application: Hexagon socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Hex-Plus, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm | |
|-------------|-----|-----|--------|-----|----|
| 05059602001 | 1.5 | 50 | 2" | 2.0 | 10 |
| 05059603001 | 2.0 | 50 | 2" | 4.0 | 10 |
| 05059628001 | 2.0 | 89 | 3 1/2" | 4.0 | 5 |
| 05059604001 | 2.5 | 50 | 2" | 4.0 | 10 |
| 05059629001 | 2.5 | 89 | 3 1/2" | 4.0 | 5 |
| 05059605001 | 3.0 | 50 | 2" | 4.0 | 10 |
| 05059630001 | 3.0 | 89 | 3 1/2" | 4.0 | 5 |
| 05380033001 | 3.0 | 152 | 6" | 4.0 | 5 |
| 05059610001 | 4.0 | 50 | 2" | 5.0 | 10 |
| 05059631001 | 4.0 | 89 | 3 1/2" | 5.0 | 5 |
| 05059634001 | 4.0 | 152 | 6" | 5.0 | 5 |
| 05059615001 | 5.0 | 50 | 2" | 6.0 | 10 |
| 05059632001 | 5.0 | 89 | 3 1/2" | 6.0 | 5 |
| 05059635001 | 5.0 | 152 | 6" | 6.0 | 5 |
| 05059620001 | 6.0 | 50 | 2" | 5.0 | 10 |
| 05059633001 | 6.0 | 89 | 3 1/2" | - | 5 |
| 05059636001 | 6.0 | 152 | 6" | - | 5 |
| 05059625001 | 8.0 | 50 | 2" | - | 10 |

Wera ABC



Z Bits

Tough bits for hard materials e.g. sheet steel or metal. In this case the screw initially turns smoothly inside the defined thread. As soon as the head of the screw touches the material surface, high torque peaks

are generated that have an affect on the screw and tool. This can mean that the bit breaks if it is too hard.

Tough Wera bits prevent any premature breakage of the drive tip. Recognisable in the catalog through the article letter Z.



840/4 Z bits, imperial

Hex-Plus



Application: Hexagon socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Hex-Plus, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | |
|-------------|-------|-----|--------|-----|
| 05350430001 | 0.05" | 50 | 2" | 2.5 |
| 05135090001 | 1/16" | 50 | 2" | 2.5 |
| 05380045001 | 1/8" | 152 | 6" | 4.0 |
| 05135091001 | 5/64" | 50 | 2" | 3.0 |
| 05059660001 | 5/64" | 89 | 3 1/2" | 3.0 |
| 05135092001 | 3/32" | 50 | 2" | 3.0 |
| 05059661001 | 3/32" | 89 | 3 1/2" | 3.5 |
| 05135093001 | 7/64" | 50 | 2" | 3.5 |
| 05059662001 | 7/64" | 89 | 3 1/2" | 4.0 |
| 05135094001 | 1/8" | 50 | 2" | 4.0 |
| 05059663001 | 1/8" | 89 | 3 1/2" | 4.0 |
| 05135095001 | 9/64" | 50 | 2" | 4.5 |
| 05059664001 | 9/64" | 89 | 3 1/2" | 4.5 |
| 05380046001 | 9/64" | 152 | 6" | 4.5 |
| 05135096001 | 5/32" | 50 | 2" | 5.0 |
| 05059665001 | 5/32" | 89 | 3 1/2" | 5.0 |
| 05380047001 | 5/32" | 152 | 6" | 5.0 |
| 05135097001 | 3/16" | 50 | 2" | 6.0 |
| 05059666001 | 3/16" | 89 | 3 1/2" | 6.0 |
| 05380048001 | 3/16" | 152 | 6" | 6.0 |
| 05135098001 | 7/32" | 50 | 2" | - |
| 05059667001 | 7/32" | 89 | 3 1/2" | - |
| 05380049001 | 7/32" | 152 | 6" | - |
| 05135099001 | 1/4" | 50 | 2" | - |
| 05059668001 | 1/4" | 89 | 3 1/2" | - |
| 05380050001 | 1/4" | 152 | 6" | - |
| 05346288001 | 5/16" | 50 | 2" | - |

842/4 Bits



Application: Hexagon socket screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Ball end, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | |
|-------------|-------|----|--------|---|
| 05059680001 | 3.0 | 89 | 3 1/2" | 5 |
| 05059681001 | 4.0 | 89 | 3 1/2" | 5 |
| 05059682001 | 5.0 | 89 | 3 1/2" | 5 |
| 05059683001 | 6.0 | 89 | 3 1/2" | 5 |
| 05380124001 | 3/32" | 89 | 3 1/2" | 5 |
| 05380125001 | 7/64" | 89 | 3 1/2" | 5 |
| 05380126001 | 1/8" | 89 | 3 1/2" | 5 |
| 05380127001 | 9/64" | 89 | 3 1/2" | 5 |
| 05380128001 | 5/32" | 89 | 3 1/2" | 5 |
| 05380129001 | 3/16" | 89 | 3 1/2" | 5 |
| 05380130001 | 7/32" | 89 | 3 1/2" | 5 |
| 05380131001 | 1/4" | 89 | 3 1/2" | 5 |

TORX® ball end tip



The spherical drive profile means that it is possible to swivel the axis of the tool to that of the screw, and therefore enable angled, "around-the-corner" screwdriving jobs. This ball tip geometry – often found on L-keys – is now available on a number of Wera bits.



Bits



Bits for Hexagon Socket Screws



5/16" hexagon drive, suitable for D 8 bit holders or direct drive (series 2)

840/2 Z Bits

Hex-Plus



Application: Hexagon socket screws


Drive: 5/16" hexagon, suitable for DIN 3126-D 8, ISO 1173 bit holders

Design: Hex-Plus, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | " | " | |
|-------------|----|----|---------|----|--|
| 05057505001 | 3 | 30 | 1 3/16" | 10 | |
| 05057510001 | 4 | 30 | 1 3/16" | 10 | |
| 05057515001 | 5 | 30 | 1 3/16" | 10 | |
| 05057520001 | 6 | 30 | 1 3/16" | 10 | |
| 05057525001 | 8 | 30 | 1 3/16" | 10 | |
| 05057530001 | 10 | 30 | 1 3/16" | 10 | |
| 05221102001 | | 30 | 1 3/16" | 10 | |
| 05135083001 | | 30 | 1 3/16" | 10 | |
| 05135084001 | | 30 | 1 3/16" | 10 | |
| 05135080001 | | 30 | 1 3/16" | 10 | |
| 05135081001 | | 30 | 1 3/16" | 10 | |
| 05135082001 | | 30 | 1 3/16" | 10 | |



How to avoid rounded screw heads



Hexagon screws can endure a problem because the contact surfaces delivering the power from the conventional tool, is transferred to the screw via very small surface areas. The consequence: the screw can become damaged (rounding out). Hex-Plus tools have a greater contact surface that prevents this from happening! Good to know: Hex-Plus tools fit into every standard hexagon socket screw!

Bits for Tamper-proof Hexagon Socket Screws with safety pin



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)



840/1 Z Tamper-proof Hex-Plus B0 bits

Hex-Plus



Application: Hexagon socket screws with safety pin (B0 = with bore hole)
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Hex-Plus with bore hole, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm |
|-------------|-----|----|----|----|
| 05056341001 | 2.0 | 25 | 1" | 10 |
| 05056342001 | 2.5 | 25 | 1" | 10 |
| 05056343001 | 3.0 | 25 | 1" | 10 |
| 05056344001 | 4.0 | 25 | 1" | 10 |
| 05056345001 | 5.0 | 25 | 1" | 10 |
| 05056346001 | 6.0 | 25 | 1" | 10 |

1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)



840/4 Z Tamper-proof Hex-Plus B0 bits

Hex-Plus



Application: Hexagon socket screws with safety pin (B0 = with bore hole)
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Hex-Plus with bore hole, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm |
|-------------|-----|----|--------|-----|
| 05059640001 | 2.0 | 89 | 3 1/2" | 4.0 |
| 05059641001 | 2.5 | 89 | 3 1/2" | 4.0 |
| 05059642001 | 3.0 | 89 | 3 1/2" | 4.0 |
| 05059643001 | 4.0 | 89 | 3 1/2" | 5.0 |
| 05059644001 | 5.0 | 89 | 3 1/2" | 6.0 |
| 05059645001 | 6.0 | 89 | 3 1/2" | - |



Bits



Bits for Square Socket Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

868/1 IMP DC Impaktor square-plus bits



NEW

Application: Square socket head screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: The Impaktor technology ensures superior service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance

| Code | mm | mm | mm | mm |
|-------------|-----|----|----|----|
| 05057631001 | # 2 | 25 | 1" | 10 |
| 05057632001 | # 3 | 25 | 1" | 10 |

868/1 BTZ Square-Plus bits

BiTorsion



Application: Square socket head screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: BiTorsion for long service life, extra-tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm |
|-------------|-----|----|----|-----|
| 05066445001 | # 1 | 25 | 1" | 4.2 |
| 05066446001 | # 2 | 25 | 1" | 4.2 |
| 05066447001 | # 3 | 25 | 1" | 5.5 |

868/1 V square bits



Application: Square socket head screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders


Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm |
|-------------|-----|----|----|-----|
| 05066394001 | # 2 | 25 | 1" | 6.1 |

Impaktor bits and holder For superior service life

Maximum utilisation of the material properties, a very special geometry – designed particularly to meet the extreme demands – as well as a specific manufacturing process mean that Wera Impaktor tools have superior service life.

Another product advantage is the coating of the Impaktor bits with minute diamond particles. These diamond particles reduce the cam-out effects – particularly high in power tool applications – which can lead to a slipping out of the screw head. The diamond particles literally bite themselves into the screw recess. This means that less contact pressure is required, something that greatly delays fatigue setting-in in power tool screwdriving jobs.



868/1 Z Square-Plus bits



Application: Square socket head screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm |
|-------------|------|----|----|-----|
| 05066395001 | # 00 | 25 | 1" | 3.5 |
| 05066400001 | # 0 | 25 | 1" | 3.5 |
| 05066405001 | # 1 | 25 | 1" | 4.5 |
| 05066410001 | # 2 | 25 | 1" | 6.0 |
| 05066415001 | # 3 | 25 | 1" | 6.0 |
| 05066420001 | # 4 | 25 | 1" | 8.0 |



1/4"

1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

868/4 IMP DC Impaktor square-plus bits



IMP-KTOR
Diamond

NEW



Application: Square socket head screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: The Impaktor technology ensures superior service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance

| Code | mm | mm | mm | |
|-------------|-----|----|----|---|
| 05057671001 | # 2 | 50 | 2" | 5 |
| 05057672001 | # 3 | 50 | 2" | 5 |

868/4 BTZ Square-Plus bits


BiTorsion



Application: Square socket head screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: BiTorsion for long service life, extra-tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | | |
|-------------|----|----|----|-----|----|
| 05060147001 | #1 | 50 | 2" | 4.2 | 10 |
| 05060148001 | #2 | 50 | 2" | 4.2 | 10 |
| 05060149001 | #3 | 50 | 2" | 5.5 | 10 |

Wera ABC



Z Bits

Tough bits for hard materials e.g. sheet steel or metal. In this case the screw initially turns smoothly inside the defined thread. As soon as the head of the screw touches the material surface, high torque peaks are generated that have an affect on the screw and tool. This can mean that the bit breaks if it is too hard. Tough Wera bits prevent any premature breakage of the drive tip. Recognisable in the catalog through the article letter Z.

868/4 V square bits



Application: Square socket head screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | | |
|-------------|-----|-----|--------|-----|----|
| 05060301001 | # 2 | 50 | 2" | 6.1 | 10 |
| 05060302001 | # 2 | 70 | 2 3/4" | 6.1 | 10 |
| 05060303001 | # 2 | 89 | 3 1/2" | 6.1 | 10 |
| 05060304001 | # 2 | 152 | 6" | 6.1 | 10 |

868/4 Square-Plus bits



Application: Square socket head screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | | |
|-------------|------|-----|--------|-----|----|
| 05060150001 | # 00 | 50 | 2" | 3.5 | 10 |
| 05060155001 | # 0 | 50 | 2" | 3.5 | 10 |
| 05060160001 | # 1 | 50 | 2" | 4.5 | 10 |
| 05060180001 | # 1 | 70 | 2 3/4" | 4.5 | 10 |
| 05134800001 | # 1 | 89 | 3 1/2" | 4.5 | 10 |
| 05134805001 | # 1 | 152 | 6" | 4.5 | 10 |
| 05060165001 | # 2 | 50 | 2" | 6.0 | 10 |
| 05060182001 | # 2 | 70 | 2 3/4" | 6.0 | 10 |
| 05134801001 | # 2 | 89 | 3 1/2" | 6.0 | 10 |
| 05134806001 | # 2 | 152 | 6" | 6.0 | 10 |
| 05060170001 | # 3 | 50 | 2" | 6.0 | 10 |
| 05060184001 | # 3 | 70 | 2 3/4" | 6.0 | 10 |
| 05134802001 | # 3 | 89 | 3 1/2" | 6.0 | 10 |
| 05134807001 | # 3 | 152 | 6" | 6.0 | 10 |
| 05060175001 | # 4 | 50 | 2" | 8.0 | 10 |



Bits



Bits for TORQ-SET® Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

871/1 DC TORQ-SET® Mplus bits



Application: TORQ-SET® screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Mplus for higher breaking torque and longer service life, diamond-coated for secure screw fit

| Code | mm | mm | mm | mm | |
|-------------|------|----|--------|------|----|
| 05066638001 | 4 | 25 | 1" | 4.7 | 10 |
| 05066640001 | 6 | 25 | 1" | 4.7 | 10 |
| 05066642001 | 8 | 25 | 1" | 6.0 | 10 |
| 05066644001 | 10 | 25 | 1" | 6.0 | 10 |
| 05066646001 | 1/4" | 32 | 1 1/4" | 11.0 | 10 |

871/1 TORQ-SET® Mplus bits, 32 mm




Application: TORQ-SET® screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Mplus for higher breaking torque and longer service life, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | |
|-------------|-------|----|--------|------|
| 05066634001 | 1/4" | 32 | 1 1/4" | 11.0 |
| 05066635001 | 5/16" | 32 | 1 1/4" | 11.0 |



How can I prevent frequent breakages of TORQ-SET® bits?

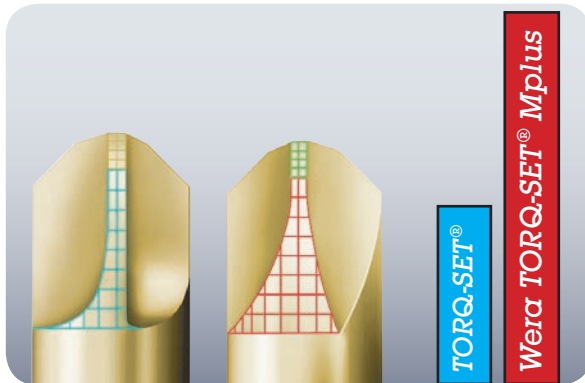

Wera developed the Mplus profile with stronger flanks compared with tools with a conventional TORQ-SET® profile. This results in approximately 70 % extra torsional strength and greatly extends the service life of Wera Mplus tools.

871/1 TORQ-SET® Mplus bits, 25 mm



Application: TORQ-SET® screws
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Mplus for higher breaking torque and longer service life, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm | |
|-------------|------|----|----|-----|----|
| 05066618001 | 0 | 25 | 1" | 4.7 | 10 |
| 05066619001 | 1 | 25 | 1" | 4.7 | 10 |
| 05066620001 | 2 | 25 | 1" | 4.7 | 10 |
| 05066622001 | 3 | 25 | 1" | 4.7 | 10 |
| 05066624001 | 4 | 25 | 1" | 4.7 | 10 |
| 05066626001 | 5 | 25 | 1" | 4.7 | 10 |
| 05066628001 | 6 | 25 | 1" | 4.7 | 10 |
| 05066630001 | 8 | 25 | 1" | 6.0 | 10 |
| 05066632001 | 10 | 25 | 1" | 6.0 | 10 |
| 05066633001 | 1/4" | 25 | 1" | 6.0 | 10 |



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)



871/4 DC TORQ-SET® Mplus bits



Application: TORQ-SET® screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Mplus for higher breaking torque and longer service life, diamond-coated for secure screw fit

| Code | mm | mm | mm | mm |
|-------------|-------|----|----|----|
| 05324901002 | 2 | 50 | 2" | 10 |
| 05066688002 | 4 | 50 | 2" | 10 |
| 05066690001 | 6 | 50 | 2" | 10 |
| 05066692001 | 8 | 50 | 2" | 10 |
| 05066694001 | 10 | 50 | 2" | 10 |
| 05066696001 | 1/4" | 50 | 2" | 10 |
| 05344515002 | 5/16" | 50 | 2" | 10 |

871/4 TORQ-SET® Mplus bits



Application: TORQ-SET® screws
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Mplus for higher breaking torque and longer service life

| Code | mm | mm | mm | mm |
|-------------|-------|----|--------|----|
| 05066660001 | 2 | 50 | 2" | 10 |
| 05066683001 | 2 | 89 | 3 1/2" | 5 |
| 05066662001 | 3 | 50 | 2" | 10 |
| 05066684001 | 3 | 89 | 3 1/2" | 5 |
| 05066664001 | 4 | 50 | 2" | 10 |
| 05066685001 | 4 | 89 | 3 1/2" | 5 |
| 05066666001 | 5 | 50 | 2" | 10 |
| 05066668001 | 6 | 50 | 2" | 10 |
| 05066676001 | 6 | 70 | 2 3/4" | 5 |
| 05066686001 | 6 | 89 | 3 1/2" | 10 |
| 05066670001 | 8 | 50 | 2" | 10 |
| 05066678001 | 8 | 70 | 2 3/4" | 5 |
| 05066687001 | 8 | 89 | 3 1/2" | 10 |
| 05066672001 | 10 | 50 | 2" | 10 |
| 05066680001 | 10 | 70 | 2 3/4" | 5 |
| 05066682001 | 10 | 89 | 3 1/2" | 5 |
| 05066674001 | 1/4" | 50 | 2" | 10 |
| 05221110001 | 5/16" | 50 | 2" | 10 |

Wera ABC



Diamond coated bits

The minute diamond particles on the tip of the bit literally bite into the screw. The secure hold means that less contact pressure is required, which reduces the risk of slipping.



Bits



Bits for TORQ-SET® Screws



5/16" hexagon drive, suitable for D 8 bit holders or direct drive (series 2)







871/2 TORQ-SET® Mplus bits



Application: TORQ-SET® screws

Drive: 5/16" hexagon, suitable for DIN 3126-D 8, ISO 1173 bit holders

Design: Mplus for higher breaking torque and longer service life, tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| Code | mm | mm | mm | mm | |
| 05066650001 | 8 | 32 | 1 1/4" | 5 | |
| 05066652001 | 10 | 32 | 1 1/4" | 5 | |
| 05066654001 | 1/4" | 32 | 1 1/4" | 5 | |
| 05066656001 | 5/16" | 32 | 1 1/4" | 5 | |
| 05066658001 | 3/8" | 32 | 1 1/4" | 5 | |



5/16" hexagon drive, suitable for F 8 bit holders or direct drive (series 6)







871/6 TORQ-SET® Mplus bits



Application: TORQ-SET® screws

Drive: 5/16" hexagon, suitable for DIN 3126-F 8, ISO 1173 bit holders

Design: Mplus for higher breaking torque and longer service life

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| Code | mm | mm | mm | mm | |
| 05066700001 | 8 | 35 | 1 3/8" | 6.0 | 5 |
| 05066702001 | 10 | 35 | 1 3/8" | 6.0 | 5 |
| 05066704001 | 1/4" | 35 | 1 3/8" | 11.0 | 5 |



7/16" hexagon drive, suitable for F 11,2 bit holders or direct drive (series 7)













871/7 TORQ-SET® Mplus bits



Application: TORQ-SET® screws

Drive: 7/16" hexagon, suitable for power tools with
DIN 3126-F 11,2, ISO 1173 chuck

Design: Mplus for higher breaking torque and longer service life

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| Code | | mm | | mm | |
| 05066740001 |  | 35 | 1 3/8" | 11.0 | 5 |
| 05066742001 |  | 35 | 1 3/8" | 11.0 | 5 |
| 05066744001 |  | 35 | 1 3/8" | 11.0 | 5 |
| 05066746001 |  | 35 | 1 3/8" | 11.0 | 5 |

5/8" direct drive hexagon (series 19)












871/19 TORQ-SET® Mplus bits



Application: TORQ-SET® screws

Drive: 5/8" hexagon

Design: Mplus for higher breaking torque and longer service life

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| Code | | mm | | | |
| 05066750001 |  | 40 | 1 9/16" | | 5 |
| 05066752001 |  | 40 | 1 9/16" | | 5 |
| 05066754001 |  | 40 | 1 9/16" | | 5 |



Bits



Bits for TRI-WING® Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

875/1 TRI-WING® bits, 25 mm



Application: TRI-WING® screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | |
|-------------|----|----|----|-----|
| 05066758001 | 0 | 25 | 1" | 4.7 |
| 05066760001 | 1 | 25 | 1" | 4.7 |
| 05066762001 | 2 | 25 | 1" | 4.7 |
| 05066764001 | 3 | 25 | 1" | 4.7 |
| 05066766001 | 4 | 25 | 1" | 6.2 |
| 05066768001 | 5 | 25 | 1" | 6.2 |

875/1 TRI-WING® bits, 32 mm



Application: TRI-WING® screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | |
|-------------|----|----|--------|------|
| 05066770001 | 6 | 32 | 1 1/4" | 11.0 |
| 05066772001 | 7 | 32 | 1 1/4" | 11.0 |
| 05066774001 | 8 | 32 | 1 1/4" | 12.5 |



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

875/4 TRI-WING® bits



Application: TRI-WING® screws

Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | |
|-------------|----|----|--------|
| 05066785001 | 1 | 89 | 3 1/2" |
| 05066786001 | 2 | 89 | 3 1/2" |
| 05066787001 | 3 | 89 | 3 1/2" |
| 05066780001 | 4 | 50 | 2" |
| 05066788001 | 4 | 89 | 3 1/2" |
| 05066782001 | 5 | 50 | 2" |
| 05066784001 | 6 | 50 | 2" |



5/16" hexagon drive, suitable for F 8 bit holders or direct drive (series 6)



875/6 TRI-WING® bits



Application: TRI-WING® screws

Drive: 5/16" hexagon, suitable for DIN 3126-F 8, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | 6 | 7 | 8 | mm | mm | mm |
|-------------|---|----|--------|------|----|----|
| 05066790001 | 6 | 35 | 1 3/8" | 11.0 | | 5 |
| 05066792001 | 7 | 35 | 1 3/8" | 11.0 | | 5 |
| 05066794001 | 8 | 35 | 1 3/8" | 12.5 | | 5 |



Bits



Bits for Multi-Point Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)







860/1 XZN multi-point bits



Application: Multi-point socket screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

|  Code |  |  mm |  mm |  mm |  |
|--|---|--|--|--|---|
| 05066150001 | M 4 | 25 | 1" | 4.17 | 10 |
| 05066155001 | M 5 | 25 | 1" | 5.14 | 10 |
| 05066160001 | M 6 | 25 | 1" | - | 10 |
| 05066165001 | M 8 | 25 | 1" | 8.0 | 5 |
| 05066170001 | M 10 | 25 | 1" | 10.0 | 5 |



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

860/4 XZN multi-point bits



Application: Multi-point socket screws

Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

|  Code |  |  mm |  mm |  mm |  |
|--|---|--|--|--|---|
| 05066175001 | M 4 | 50 | 2" | 4.17 | 10 |
| 05066180001 | M 5 | 50 | 2" | 5.14 | 10 |
| 05066185001 | M 6 | 50 | 2" | - | 10 |
| 05066190001 | M 8 | 50 | 2" | 8.0 | 5 |
| 05066195001 | M 10 | 50 | 2" | 10.0 | 5 |
| 05066200001 | M 12 | 50 | 2" | 12.0 | 5 |

Bits for Hi-TORQUE Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)



800/1 HTN Hi-TORQUE bits



Application: Hi-TORQUE screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

| Code | mm | mm | mm | |
|-------------|----|----|--------|---|
| 05055950001 | 1 | 32 | 1 1/4" | 5 |
| 05055951001 | 2 | 32 | 1 1/4" | 5 |
| 05055952001 | 3 | 32 | 1 1/4" | 5 |
| 05055953001 | 4 | 32 | 1 1/4" | 5 |

700 A HTS Hi-TORQUE bits



NEW

Application: For Hi-TORQUE screws

Drive: 1/4"-square drive socket

| Code | mm | mm | mm | |
|-------------|----|----|----|---|
| 05040030001 | 0 | 25 | 1" | 5 |
| 05040031001 | 1 | 25 | 1" | 5 |
| 05040032001 | 2 | 25 | 1" | 5 |
| 05040033001 | 3 | 25 | 1" | 5 |
| 05040034001 | 4 | 25 | 1" | 5 |

700 B HTS Hi-TORQUE bits



NEW

Application: For Hi-TORQUE screws

Drive: 3/8"-square drive socket

| Code | mm | mm | mm | |
|-------------|----|----|--------|---|
| 05040040001 | 3 | 25 | 1" | 5 |
| 05040041001 | 4 | 25 | 1" | 5 |
| 05040042001 | 5 | 32 | 1 1/4" | 5 |
| 05040043001 | 6 | 32 | 1 1/4" | 5 |

700 C HTS Hi-TORQUE bits



NEW

Application: For Hi-TORQUE screws

Drive: 1/2"-square drive socket

| Code | mm | mm | mm | |
|-------------|----|----|--------|---|
| 05040045001 | 7 | 42 | 1 5/8" | 5 |
| 05040046001 | 8 | 42 | 1 5/8" | 5 |
| 05040047001 | 9 | 42 | 1 5/8" | 5 |
| 05040048001 | 10 | 42 | 1 5/8" | 5 |
| 05040049001 | 12 | 60 | 2 3/8" | 5 |



Bits



Bits for Tamper-proof Five Lobe Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

873/1 Five Lobe bits with bore hole



Application: Five Lobe screws with safety pin
Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm |
|-------------|----|----|--------|----|
| 05066601001 | 10 | 25 | 1" | 10 |
| 05066602001 | 15 | 25 | 1" | 10 |
| 05066603001 | 20 | 25 | 1" | 10 |
| 05066604001 | 25 | 25 | 1" | 10 |
| 05066605001 | 27 | 25 | 1" | 10 |
| 05066606001 | 30 | 25 | 1" | 10 |
| 05066607001 | 40 | 35 | 1 3/8" | 10 |



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

873/4 Five Lobe bits with bore hole



Application: Five Lobe screws with safety pin
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | mm |
|-------------|----|----|--------|-----|
| 05066610001 | 10 | 89 | 3 1/2" | 4.0 |
| 05066611001 | 15 | 89 | 3 1/2" | 4.0 |
| 05066612001 | 20 | 89 | 3 1/2" | 4.5 |
| 05066613001 | 25 | 89 | 3 1/2" | 6.0 |
| 05066614001 | 27 | 89 | 3 1/2" | 6.0 |
| 05066615001 | 30 | 89 | 3 1/2" | 6.0 |

Bits for Spanner Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)



857/1 Z spanner bits



Application: Spanner screws

Drive: 1/4" hexagon, suitable for DIN 3126-D 6.3, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | |
|-------------|----|----|----|------|
| 05057150001 | 4 | 25 | 1" | 3.18 |
| 05057151001 | 6 | 25 | 1" | 4.32 |
| 05057152001 | 8 | 25 | 1" | 5.21 |
| 05057153001 | 10 | 25 | 1" | 6.10 |

1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)



857/4 Z spanner bits




Application: Spanner screws

Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders

Design: Tough, ideal for difficult screwdriving jobs e.g. in sheet steel or metal

| Code | mm | mm | mm | |
|-------------|----|----|--------|------|
| 05057160001 | 4 | 89 | 3 1/2" | 3.18 |
| 05057161001 | 6 | 89 | 3 1/2" | 4.32 |
| 05057162001 | 8 | 89 | 3 1/2" | 5.21 |
| 05057163001 | 10 | 89 | 3 1/2" | 6.10 |

Wera ABC



Z Bits

Tough bits for hard materials e.g. sheet steel or metal. In this case the screw initially turns smoothly inside the defined thread. As soon as the head of the screw touches the material surface, high torque peaks

are generated that have an affect on the screw and tool. This can mean that the bit breaks if it is too hard.

Tough Wera bits prevent any premature breakage of the drive tip. Recognisable in the catalog through the article letter Z.



Bits



Nutsetters



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

869/4 Nutsetters, metric



Application: Hexagon headed bolts, screws and nuts
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Non-magnetic

| Code | mm | mm | mm | |
|-------------|------|-------|------|---|
| 05380276002 | 5.0 | 152.0 | 11.0 | 5 |
| 05060400002 | 5.5 | 50.0 | 11.0 | 5 |
| 05060272004 | 5.5 | 65.0 | 9.5 | 5 |
| 05380277002 | 5.5 | 152.0 | 11.0 | 5 |
| 05060401002 | 6.0 | 50.0 | 11.0 | 5 |
| 05060274002 | 6.0 | 65.0 | 11.0 | 5 |
| 05380278002 | 6.0 | 152.0 | 11.0 | 5 |
| 05060402002 | 7.0 | 50.0 | 11.0 | 5 |
| 05060276003 | 7.0 | 65.0 | 11.0 | 5 |
| 05380279002 | 7.0 | 152.0 | 11.0 | 5 |
| 05060403002 | 8.0 | 50.0 | 12.5 | 5 |
| 05060278003 | 8.0 | 65.0 | 12.5 | 5 |
| 05380280002 | 8.0 | 152.0 | 12.5 | 5 |
| 05060404002 | 9.0 | 50.0 | 14.0 | 5 |
| 05060280002 | 9.0 | 65.0 | 14.0 | 5 |
| 05380281002 | 9.0 | 152.0 | 14.0 | 5 |
| 05060405002 | 10.0 | 50.0 | 14.0 | 5 |
| 05060282003 | 10.0 | 65.0 | 14.0 | 5 |
| 05380282002 | 10.0 | 152.0 | 14.0 | 5 |
| 05060406002 | 11.0 | 50.0 | 16.0 | 5 |
| 05060281002 | 11.0 | 65.0 | 16.0 | 5 |
| 05380283002 | 11.0 | 152.0 | 16.0 | 5 |
| 05060407002 | 12.0 | 50.0 | 18.0 | 5 |
| 05060283003 | 12.0 | 65.0 | 17.0 | 5 |
| 05380284002 | 12.0 | 152.0 | 18.0 | 5 |
| 05060408002 | 13.0 | 50.0 | 18.0 | 5 |
| 05060284004 | 13.0 | 65.0 | 19.0 | 5 |
| 05380285002 | 13.0 | 152.0 | 18.0 | 5 |

869/4 Nutsetters, imperial



Application: Hexagon headed bolts, screws and nuts
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Non-magnetic

| Code | mm | mm | | |
|-------------|--------|-------|------|---|
| 05380304002 | 3/16" | 152.0 | 11.0 | 5 |
| 05060409002 | 1/4" | 50.0 | 11.0 | 5 |
| 05060286002 | 1/4" | 65.0 | 11.0 | 5 |
| 05380305002 | 1/4" | 152.0 | 11.0 | 5 |
| 05380306002 | 9/32" | 152.0 | 11.0 | 5 |
| 05060410002 | 5/16" | 50.0 | 12.5 | 5 |
| 05060290004 | 5/16" | 65.0 | 12.5 | 5 |
| 05380307002 | 5/16" | 152.0 | 12.5 | 5 |
| 05380308002 | 11/32" | 152.0 | 14.0 | 5 |
| 05060411002 | 3/8" | 50.0 | 14.0 | 5 |
| 05060288002 | 3/8" | 65.0 | 14.0 | 5 |
| 05380309002 | 3/8" | 152.0 | 14.0 | 5 |
| 05060412002 | 7/16" | 50.0 | 16.0 | 5 |
| 05380310002 | 7/16" | 152.0 | 16.0 | 5 |
| 05380311002 | 1/2" | 152.0 | 18.0 | 5 |
| 05380312002 | 9/16" | 152.0 | 20.0 | 5 |
| 05380313002 | 5/8" | 152.0 | 22.0 | 5 |



869/4 M nutsetters, magnetic, metric



Application: Hexagon headed bolts, screws and nuts
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Strong permanent magnet

| Code | mm | mm | mm | |
|-------------|------|-------|------|---|
| 05380336002 | 5.0 | 152.0 | 11.0 | 5 |
| 05060420002 | 5.5 | 50.0 | 11.0 | 5 |
| 05060210009 | 5.5 | 65.0 | 11.0 | 5 |
| 05380337002 | 5.5 | 152.0 | 11.0 | 5 |
| 05060421002 | 6.0 | 50.0 | 11.0 | 5 |
| 05060215007 | 6.0 | 65.0 | 11.0 | 5 |
| 05380338002 | 6.0 | 152.0 | 11.0 | 5 |
| 05060422002 | 7.0 | 50.0 | 11.0 | 5 |
| 05060220010 | 7.0 | 65.0 | 11.0 | 5 |
| 05380339002 | 7.0 | 152.0 | 11.0 | 5 |
| 05060423003 | 8.0 | 50.0 | 12.5 | 5 |
| 05060225005 | 8.0 | 65.0 | 12.5 | 5 |
| 05380340002 | 8.0 | 152.0 | 12.5 | 5 |
| 05060424002 | 9.0 | 50.0 | 14.0 | 5 |
| 05060230005 | 9.0 | 65.0 | 14.0 | 5 |
| 05380341002 | 9.0 | 152.0 | 14.0 | 5 |
| 05060425003 | 10.0 | 50.0 | 14.0 | 5 |
| 05060235014 | 10.0 | 65.0 | 14.0 | 5 |
| 05380342002 | 10.0 | 152.0 | 14.0 | 5 |
| 05060426002 | 11.0 | 50.0 | 16.0 | 5 |
| 05060237004 | 11.0 | 65.0 | 16.0 | 5 |
| 05380343002 | 11.0 | 152.0 | 16.0 | 5 |
| 05060427003 | 12.0 | 50.0 | 18.0 | 5 |
| 05060238003 | 12.0 | 65.0 | 17.0 | 5 |
| 05380344002 | 12.0 | 152.0 | 18.0 | 5 |
| 05060428002 | 13.0 | 50.0 | 18.0 | 5 |
| 05060240008 | 13.0 | 65.0 | 19.0 | 5 |
| 05380345002 | 13.0 | 152.0 | 18.0 | 5 |

869/4 M nutsetters, magnetic, imperial



Application: Hexagon headed bolts, screws and nuts
Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders
Design: Strong permanent magnet

| Code | mm | mm | | |
|-------------|--------|-------|------|---|
| 05380364002 | 3/16" | 152.0 | 11.0 | 5 |
| 05060429002 | 1/4" | 50.0 | 11.0 | 5 |
| 05060255002 | 1/4" | 65.0 | 11.0 | 5 |
| 05380365002 | 1/4" | 152.0 | 11.0 | 5 |
| 05380366002 | 9/32" | 152.0 | 11.0 | 5 |
| 05060430002 | 5/16" | 50.0 | 12.5 | 5 |
| 05060260004 | 5/16" | 65.0 | 12.5 | 5 |
| 05380367002 | 5/16" | 152.0 | 12.5 | 5 |
| 05380368002 | 11/32" | 152.0 | 14.0 | 5 |
| 05060431002 | 3/8" | 50.0 | 14.0 | 5 |
| 05060265006 | 3/8" | 65.0 | 14.0 | 5 |
| 05380369002 | 3/8" | 152.0 | 14.0 | 5 |
| 05060432002 | 7/16" | 50.0 | 16.0 | 5 |
| 05380370002 | 7/16" | 152.0 | 16.0 | 5 |
| 05380371002 | 1/2" | 152.0 | 18.0 | 5 |
| 05380372002 | 9/16" | 152.0 | 20.0 | 5 |
| 05380373002 | 5/8" | 152.0 | 22.0 | 5 |



Bits



Internal Thread Insertion Tool



1/4"

1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)


879/4 Internal thread insertion tool



Application: Hanger bolts and threaded rods

Drive: 1/4" hexagon, suitable for DIN 3126-F 6.3, ISO 1173 bit holders

Design: Internal thread

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| Code | | mm | 2" | mm | |
| 05135902002 | M6 | 50.0 | 2" | 8.0 | 5 |
| 05135903005 | M8 | 50.0 | 2" | 12.0 | 5 |
| 05135904005 | M10 | 50.0 | 2" | 12.0 | 5 |